

### 3 Motor protection relays



- Thermal overload relays for currents between 0.09 and 420A
- Electronic thermal overload relays for currents between 0.4 and 110A
- Electronic thermal overload relays with selectable tripping class: 5-10-20-30
- Phase failure sensitive and non phase failure sensitive versions
- Automatic and/or manual resetting
- Independent or direct mounting on contactor
- Thermistor protection relay.

	SEC. - PAGE
<b>Thermal overload relays</b>	
For BG series mini-contactors .....	3 - 2
For BF series contactors .....	3 - 4
For B series contactors .....	3 - 8
Accessories .....	3 - 10
<b>Electronic thermal overload relays</b>	
For BF series contactors .....	3 - 11
<b>Electronic relay</b>	
Thermistor protection relays .....	3 - 12
<b>Dimensions</b> .....	<b>3 - 13</b>
<b>Wiring diagrams</b> .....	<b>3 - 14</b>
<b>Technical characteristics</b> .....	<b>3 - 15</b>

Type of contactor	TYPE OF THERMAL OVERLOAD RELAY				Pages	ELECTRONIC THERMAL OVERLOAD RELAYS	
	Phase failure / single phase sensitive		Non phase failure / non single phase sensitive			Phase failure / single phase sensitive Manual/hand or automatic reset	Pages
	Manual/hand reset	Automatic reset	Manual/hand reset	Automatic reset			
BG06...BG12	<b>RF9</b>	<b>RFA9</b>	<b>RFN9</b>	<b>RFNA9</b>	3-2 and 3-3	—	—
BF09...BF38	<b>RF38</b>		<b>RFN38</b>		3-4...3-6	RFE45	3-11
BF40...BF94	<b>RF82</b>	<b>RFA82</b>	<b>RFN82</b>	<b>RFNA82</b>	3-5 and 3-7	RFE45 / RFE110❶	3-11
BF95...BF150	<b>RF110</b>	<b>RFA110</b>	<b>RFN110</b>	<b>RFNA110</b>	3-4...3-7	RFE110❶	3-11
B145...B180	<b>RF200</b>		<b>RFN200</b>		3-8 and 3-9	—	—
B250...B400	<b>RF400</b>		<b>RFN400</b>				

❶ Independent mounting RFE110



Page 3-2

**FOR BG SERIES MINI-CONTACTORS**

- Type RF9, phase failure sensitive, manual resetting
- Type RFA9, phase failure sensitive, automatic resetting
- Type RFN9, non phase failure sensitive, manual resetting
- Type RFNA9, non phase failure sensitive, automatic resetting.



Page 3-4

**FOR BF SERIES CONTACTORS**

- Type RF38, phase failure sensitive, manual or automatic resetting
- Type RFN38, non phase failure sensitive, manual or automatic resetting
- Type RF82 and RF110, phase failure sensitive, manual resetting
- Type RFA82 and RFA110, phase failure sensitive, automatic resetting
- Type RFN82 and RFN110, non phase failure sensitive, manual resetting
- Type RFNA82 and RFNA110, non phase failure sensitive, automatic resetting.



Page 3-8

**FOR B SERIES CONTACTORS**

- Type RF200 and RF420, phase failure sensitive, manual or automatic resetting
- Type RFN200 and RFN420, non phase failure sensitive, manual or automatic resetting.



Page 3-11

**ELECTRONIC THERMAL OVERLOAD RELAYS FOR BF SERIES CONTACTORS**

- Phase failure sensitive, manual or automatic resetting
- Selectable tripping class: 5-10-20-30
- High reliability and accuracy of tripping
- Minimal heat dissipation
- Wide current adjustment range.



Page 3-12

**THERMISTOR PROTECTION RELAY**

- 24VDC and 24 to 240VAC supply types.



LOVATO Electric motor protection relays are suitable for new motors with high IE3 efficiency values

**RF38 features**

**FRONT PROTECTION COVER OF THERMAL OVERLOAD RELAYS**

A sealable protection cover is available. When fitted on to the relay front, it precludes all possible adjuster tampering and involuntary activation of the "Reset" and "Stop" buttons of the thermal overload relay.




**CLEAR IDENTIFICATION OF THERMAL OVERLOAD RELAY MANUAL OR AUTOMATIC RESETTING**

The RF38 thermal overload relay is supplied configured for manual resetting. Breaking the plate below the "Reset" button allows for the automatic resetting configuration.



**FIXING EASE OF THE THERMAL OVERLOAD RELAY**

While the thermal overload relay is being linked to the contactor, its auxiliary contact fits on and connects to the coil terminal by rigid terminal. Complete relay fixing is done in a single operation, with no need of other connections.



**SEALABLE RELAY COVER**

A handy closing flap feature excludes any tampering of the thermal overload relay adjuster.



### 3 Motor protection relays

Thermal overload relays  
for BG series mini-contactors

#### Phase failure / single phase sensitive Three poles (three phase)



11 RF9...



11 RFA9...

Order code	Adjustment range	Protection fuses			Qty per pkg	Wt [kg]
		IEC aM	gG	UL K5		
	[A]	[A]	[A]	[A]	n°	[kg]

#### MANUAL RESETTING.

Direct mounting on BG06, BG09, BG12 mini-contactors.

11 RF9 015	0.09...0.15	0.25	—	—	1	0.116
11 RF9 023	0.14...0.23	0.5	—	1	1	0.116
11 RF9 033	0.2...0.33	0.5	1	1	1	0.116
11 RF9 05	0.3...0.5	1	2	3	1	0.116
11 RF9 075	0.45...0.75	1	2	3	1	0.116
11 RF9 1	0.6...1	2	4	3	5	0.116
11 RF9 1V5	0.9...1.5	2	4	6	5	0.116
11 RF9 2V3	1.4...2.3	4	6	10	5	0.116
11 RF9 33	2...3.3	4	10	10	5	0.116
11 RF9 5	3...5	6	16	15	5	0.116
11 RF9 75	4.5...7.5	8	20	25	5	0.116
11 RF9 10	6...10	10	32	30	5	0.116
11 RF9 15	9...15	16	40	45	5	0.116

#### AUTOMATIC RESETTING.

Direct mounting on BG06, BG09, BG12 mini-contactors.

11 RFA9 015	0.09...0.15	0.25	—	—	1	0.116
11 RFA9 023	0.14...0.23	0.5	—	1	1	0.116
11 RFA9 033	0.2...0.33	0.5	1	1	1	0.116
11 RFA9 05	0.3...0.5	1	2	3	1	0.116
11 RFA9 075	0.45...0.75	1	2	3	1	0.116
11 RFA9 1	0.6...1	2	4	3	1	0.116
11 RFA9 1V5	0.9...1.5	2	4	6	1	0.116
11 RFA9 2V3	1.4...2.3	4	6	10	1	0.116
11 RFA9 33	2...3.3	4	10	10	1	0.116
11 RFA9 5	3...5	6	16	15	1	0.116
11 RFA9 75	4.5...7.5	8	20	25	1	0.116
11 RFA9 10	6...10	10	32	30	1	0.116
11 RFA9 15	9...15	16	40	45	1	0.116

NOTE: Two-pole (single phase) versions are available on request. Add the letter "S" in the order code e.g. 11RF9015 is three pole; 11RFS9015 two pole. The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

#### Three-phase IEC motor powers ①


230V	400V	500V	690V
[kW]	[kW]	[kW]	[kW]

0.06	0.06	0.06	0.06
0.09	0.09	0.09	0.09
0.12	0.12	0.12	0.12
0.18	0.18	0.18	0.18
0.25-0.37	0.25-0.37	0.25-0.37	0.25-0.37
0.55	0.55	0.55	0.55
0.75	0.75	0.75	0.75
1.1-1.5	1.1-1.5	1.1-1.5	1.1-1.5
2.2	2.2	2.2	2.2
3	3	3	3

0.06	0.06	0.06	0.06
0.09	0.09	0.09	0.09
0.12	0.12	0.12	0.12
0.18	0.18	0.18	0.18
0.25-0.37	0.25-0.37	0.25-0.37	0.25-0.37
0.55	0.55	0.55	0.55
0.75	0.75	0.75	0.75
1.1-1.5	1.1-1.5	1.1-1.5	1.1-1.5
2.2	2.2	2.2	2.2
3	3	3	3

- ① The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.
- ② No standard power ratings exist; select relay according to current consumption.

NOTE: to facilitate connection between the auxiliary NC contact of the RF...9 thermal relay and terminal A2 of the contactor, insert the conductor into the appropriate conduit as shown.

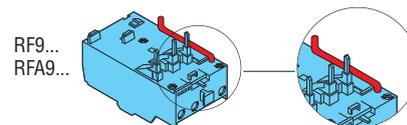

#### Certifications and compliance

Certifications obtained:

Type	cULus	CSA	EAC	CCC
RF9... - RFA9...	●	●	●	●

● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating; the trip current is 120% FLA.  
CSA – CSA certified for Canada only (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

### 3 Motor protection relays

Thermal overload relays  
for BG series mini-contactors

**Non phase failure /  
non single phase sensitive  
Three poles (three phase)**



11 RFN9...



11 RFNA9...

Order code	Adjustment range	Protection fuses			Qty per pkg	Wt [kg]
		IEC aM [A]	gG [A]	UL K5 [A]		

MANUAL RESETTING.  
Direct mounting on BG06, BG09, BG12 mini-contactors.

11 RFN9 015	0.09...0.15	0.25	—	—	1	0.123
11 RFN9 023	0.14...0.23	0.5	—	1	1	0.123
11 RFN9 033	0.2...0.33	0.5	1	1	1	0.123
11 RFN9 05	0.3...0.5	1	2	3	1	0.123
11 RFN9 075	0.45...0.75	1	2	3	1	0.123
11 RFN9 1	0.6...1	2	4	3	1	0.123
11 RFN9 1V5	0.9...1.5	2	4	6	1	0.123
11 RFN9 2V3	1.4...2.3	4	6	10	1	0.123
11 RFN9 33	2...3.3	4	10	10	1	0.123
11 RFN9 5	3...5	6	16	15	1	0.123
11 RFN9 75	4.5...7.5	8	20	25	1	0.123
11 RFN9 10	6...10	10	32	30	1	0.123
11 RFN9 15	9...15	16	40	45	1	0.123

AUTOMATIC RESETTING.  
Direct mounting on BG06, BG09, BG12 mini-contactors.

11 RFNA9 015	0.09...0.15	0.25	—	—	1	0.123
11 RFNA9 023	0.14...0.23	0.5	—	1	1	0.123
11 RFNA9 033	0.2...0.33	0.5	1	1	1	0.123
11 RFNA9 05	0.3...0.5	1	2	3	1	0.123
11 RFNA9 075	0.45...0.75	1	2	3	1	0.123
11 RFNA9 1	0.6...1	2	4	3	1	0.123
11 RFNA9 1V5	0.9...1.5	2	4	6	1	0.123
11 RFNA9 2V3	1.4...2.3	4	6	10	1	0.123
11 RFNA9 33	2...3.3	4	10	10	1	0.123
11 RFNA9 5	3...5	6	16	15	1	0.123
11 RFNA9 75	4.5...7.5	8	20	25	1	0.123
11 RFNA9 10	6...10	10	32	30	1	0.123
11 RFNA9 15	9...15	16	40	45	1	0.123

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

#### Three-phase IEC motor powers ①


230V [kW]	400V [kW]	500V [kW]	690V [kW]
-----------	-----------	-----------	-----------

②	②	②	0.06
②	0.06	0.06	0.09
②	0.09	0.09	0.12
0.06	0.12	0.12	0.18
0.09-0.12	0.18	0.18	0.25-0.37
0.12	0.25	0.25-0.37	0.55
0.18	0.37	0.55	0.75
0.25-0.37	0.55-0.75	0.75	1.1-1.5
0.55	1.1	1.1-1.5	1.5-2.2
0.75	1.5	2.2	3
1.1-1.5	2.2-3	3-4	4-5.5
2.2	4	4-5.5	7.5
3	5.5	7.5	11

②	②	②	0.06
②	0.06	0.06	0.09
②	0.09	0.09	0.12
0.06	0.12	0.12	0.18
0.09-0.12	0.18	0.18	0.25-0.37
0.12	0.25	0.25-0.37	0.55
0.18	0.37	0.55	0.75
0.25-0.37	0.55-0.75	0.75	1.1-1.5
0.55	1.1	1.1-1.5	1.5-2.2
0.75	1.5	2.2	3
1.1-1.5	2.2-3	3-4	4-5.5
2.2	4	4-5.5	7.5
3	5.5	7.5	11

- ① The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.
- ② No standard power ratings exist; select relay according to current consumption.

NOTE: to facilitate connection between the auxiliary NC contact of the RFN...9 thermal relay and terminal A2 of the contactor, insert the conductor into the appropriate conduit as shown.

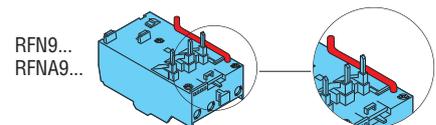

#### Certifications and compliance

Certifications obtained:

Type	cULus	CSA	EAC	CCC
RFN9... - RFNA9...	●	●	●	●

● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating; the trip current is 120% FLA.

CSA – CSA certified for Canada only (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

### 3 Motor protection relays

Thermal overload relays  
for BF series contactors

**Phase failure /  
single phase sensitive  
Three poles (three phase)**



RF38...

Order code	Adjustment range	Protection fuses			Qty per pkg	Wt [kg]
		IEC aM [A]	gG [A]	UL RK5 [A]		
	[A]	[A]	[A]	[A]	n°	[kg]

MANUAL OR AUTOMATIC RESETTING.  
Direct mounting on BF09...BF38 contactors.  
Independent mounting with RFX38 04 base.

RF38 0016	0.1...0.16	0.25	—	1	1	0.160
RF38 0025	0.16...0.25	0.5	—	1	1	0.160
RF38 0040	0.25...0.4	0.5	1	3	1	0.160
RF38 0063	0.4...0.63	1	2	3	1	0.160
RF38 0100	0.63...1	2	4	3	5	0.160
RF38 0160	1...1.6	2	4	6	5	0.160
RF38 0250	1.6...2.5	4	6	10	5	0.160
RF38 0400	2.5...4	4	6	15	5	0.160
RF38 0650	4...6.5	8	16	25	5	0.160
RF38 1000	6.3...10	10	20	40	5	0.160
RF38 1400	9...14	16	32	50	5	0.160
RF38 1800	13...18	25	40	70	5	0.160
RF38 2300	17...23	25	50	90	5	0.160
RF38 2500	20...25	32	50	100	5	0.160
RF38 3200	24...32	40	63	120	1	0.160
RF38 3800	32...38	40	63	150	1	0.160

NOTE: Two pole (single phase) versions are available on request.  
Add the letter "S" in the order code e.g. RF381000 is three pole; RFS381000 two pole.  
The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

#### Three-phase IEC motor powers ②

230V [kW]	400V [kW]	500V [kW]	690V [kW]
-----------	-----------	-----------	-----------

②	②	②	0.06
②	0.06	0.06-0.09	0.09-0.12
0.06	0.09	0.12	0.18
0.09	0.12-0.18	0.18	0.25
0.12	0.25	0.25-0.37	0.37-0.55
0.18-0.25	0.37-0.55	0.55-0.75	0.75
0.37	0.75	1.1	1.1-1.5
0.55-0.75	1.1-1.5	1.5-2.2	2.2-3
1.1-1.5	2.2	3	4
1.5-2.2	3-4	4-5.5	5.5-7.5
3	5.5	5.5-7.5	11
4	7.5	11	15
5.5	11	11	18.5
5.5	11	15	22
7.5	15	18.5	30
11	18.5	22	30

- ② No standard powers ratings exist; select relay according to current consumption.
- ③ The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

#### Certifications and compliance

Certifications obtained:

Type	cULus	CSA	EAC	CCC	Register of shipping
RF38	●	—	●	●	—


- Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 82A FLA range and 10000 Amps RMS for 95A and 110A FLA range; the trip current is 120% FLA.  
CSA – CSA certified for Canada only (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

#### FIXING EASE OF THE THERMAL OVERLOAD RELAY

While the thermal overload relay is being linked to the contactor, its auxiliary contact fits on and connects to the coil terminal by rigid terminal. Complete relay fixing is done in a single operation, with no need of other connections.



### 3 Motor protection relays

Thermal overload relays for BF series contactors

#### Phase failure / single phase sensitive Three poles (three phase)



RF82...

**new**



RF110...

**new**



RFA82...

**new**



RFA110...

**new**

Order code	Adjustment range	Protection fuses			Qty per pkg	Wt [kg]
		IEC aM	gG	UL RK5		
	[A]	[A]	[A]	[A]	n°	

MANUAL RESETTING.  
Direct mounting on BF40...BF94 contactors.  
Independent mounting with 11 G270 base.

<b>RF82 3300</b>	20...33	40	63	110	1	0.365
<b>RF82 4200</b>	28...42	50	80	150	1	0.365
<b>RF82 5000</b>	35...50	50	100	175	1	0.365
<b>RF82 6500</b>	46...65	80	125	200	1	0.365
<b>RF82 8200</b>	60...82	100	200	250	1	0.365
<b>RF82 9500</b>	70...95	100	200	250	1	0.365

MANUAL RESETTING.  
Direct mounting on BF95...BF150 contactors.  
Independent mounting with 11 G270 base.

<b>RF110 082</b>	60...82	100	200	250	1	0.365
<b>RF110 095</b>	70...95	100	200	350	1	0.365
<b>RF110 110</b>	90...110	125	200	350	1	0.365

AUTOMATIC RESETTING.  
Direct mounting on BF40...BF94 contactors.  
Independent mounting with 11 G270 base.

<b>RFA82 3300</b>	20...33	40	63	110	1	0.365
<b>RFA82 4200</b>	28...42	50	80	150	1	0.365
<b>RFA82 5000</b>	35...50	50	100	175	1	0.365
<b>RFA82 6500</b>	46...65	80	125	200	1	0.365
<b>RFA82 8200</b>	60...82	100	200	250	1	0.365
<b>RFA82 9500</b>	70...95	100	200	250	1	0.365

AUTOMATIC RESETTING.  
Direct mounting on BF95...BF150 contactors.  
Independent mounting with 11 G270 base.

<b>RFA110 082</b>	60...82	100	200	250	1	0.365
<b>RFA110 095</b>	70...95	100	200	350	1	0.365
<b>RFA110 110</b>	90...110	125	200	350	1	0.365

NOTE: Two pole (single phase) versions are available on request.  
Add the letter "S" in the order code e.g. RF828200 is three pole; RFS828200 two pole.

The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

#### Three-phase IEC motor powers

230V [kW]	400V [kW]	500V [kW]	690V [kW]
-----------	-----------	-----------	-----------

7.5	11-15	15-18.5	22-25
9-10	15-18.5	22-25	30-33
10-11	22	30	37-40
15-18.5	25-30	33-40	45-55
22	33-40	45-55	59-75
22	33-40	45-55	59-75

22	33-40	45-55	59-75
22-25	40-45	55-63	75-80
30	55	75	90

7.5	11-15	15-18.5	22-25
9-10	15-18.5	22-25	30-33
10-11	22	30	37-40
15-18.5	25-30	33-40	45-55
22	33-40	45-55	59-75
22	33-40	45-55	59-75

22	33-40	45-55	59-75
22-25	40-45	55-63	75-80
30	55	75	90

● The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range

#### Certifications and compliance

Certifications obtained:

Type	cULus	CSA	EAC	Register of shipping LROS
RF82	●	—	●	—
RFA82	●	—	●	—
RF110	●	—	—	—
RFA110	●	—	—	—

● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 82A FLA range and 10000 Amps RMS for 95A and 110A FLA range; the trip current is 120% FLA.

CSA – CSA certified for Canada only (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

#### FIXING EASE OF THE THERMAL OVERLOAD RELAY

While the thermal overload relay is being linked to the contactor, its auxiliary contact fits on and connects to the coil terminal by rigid terminal. Complete relay fixing is done in a single operation, with no need of other connections.



### 3 Motor protection relays

Thermal overload relays  
for BF series contactors

**Non phase failure /  
non single phase  
sensitive  
Three poles (three phase)**



RFN38...

Order code	Adjustment range	Protection fuses			Qty per pkg	Wt [kg]
		IEC aM [A]	gG [A]	UL RK5 [A]		

MANUAL OR AUTOMATIC RESETTING.  
Direct mounting on BF09...BF38 contactors.  
Independent mounting with RFX38 04 base.

RFN38 0016	0.1...0.16	0.25	—	1	1	0.160
RFN38 0025	0.16...0.25	0.5	—	1	1	0.160
RFN38 0040	0.25...0.4	0.5	1	3	1	0.160
RFN38 0063	0.4...0.63	1	2	3	1	0.160
RFN38 0100	0.63...1	2	4	3	1	0.160
RFN38 0160	1...1.6	2	4	6	1	0.160
RFN38 0250	1.6...2.5	4	6	10	1	0.160
RFN38 0400	2.5...4	4	6	15	1	0.160
RFN38 0650	4...6.5	8	16	25	1	0.160
RFN38 1000	6.3...10	10	20	40	1	0.160
RFN38 1400	9...14	16	32	50	1	0.160
RFN38 1800	13...18	25	40	70	1	0.160
RFN38 2300	17...23	25	50	90	1	0.160
RFN38 2500	20...25	32	50	100	1	0.160
RFN38 3200	24...32	40	63	125	1	0.160
RFN38 3800	32...38	40	63	150	1	0.160

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

#### Three-phase IEC motor powers ②

230V [kW]	400V [kW]	500V [kW]	690V [kW]
-----------	-----------	-----------	-----------

②	②	②	0.06
②	0.06	0.06-0.09	0.09-0.12
0.06	0.09	0.12	0.18
0.09	0.12-0.18	0.18	0.25
0.12	0.25	0.25-0.37	0.37-0.55
0.18-0.25	0.37-0.55	0.55-0.75	0.75
0.37	0.75	1.1	1.1-1.5
0.55-0.75	1.1-1.5	1.5-2.2	2.2-3
1.1-1.5	2.2	3	4
1.5-2.2	3-4	4-5.5	5.5-7.5
3	5.5	5.5-7.5	11
4	7.5	11	15
5.5	11	11	18.5
5.5	11	15	22
7.5	15	18.5	30
11	18.5	22	30

② No standard power ratings exist; select relay according to current consumption.

③ The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

#### Certifications and compliance

Certifications obtained:

Type	cULus	CSA	EAC	CCC
RFN38	●	—	●	●

● Certified products.


cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 82A FLA range and 10000 Amps RMS for 95A and 110A FLA range; the trip current is 120% FLA.

CSA – CSA certified for Canada only (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

#### FIXING EASE OF THE THERMAL OVERLOAD RELAY

While the thermal overload relay is being linked to the contactor, its auxiliary contact fits on and connects to the coil terminal by rigid terminal. Complete relay fixing is done in a single operation, with no need of other connections.



### 3 Motor protection relays

Thermal overload relays for BF series contactors

**Non phase failure / non single phase sensitive Three poles (three phase)**



RFN82...

**new**



RFN110...

**new**



RFNA82...

**new**



RFNA110...

**new**

Order code	Adjustment range	Protection fuses			Qty per pkg	Wt [kg]
		IEC aM [A]	UL gG [A]	K5 [A]		
	[A]	[A]	[A]	[A]	n°	[kg]

MANUAL RESETTING.  
Direct mounting on BF40...BF94 contactors.  
Independent mounting with 11 G270 base.

<b>RFN82 4200</b>	28...42	50	80	150	1	0.365
<b>RFN82 5000</b>	35...50	50	100	175	1	0.365
<b>RFN82 6500</b>	46...65	80	125	200	1	0.365
<b>RFN82 8200</b>	60...82	100	200	250	1	0.365
<b>RFN82 9500</b>	70...95	100	200	250	1	0.365

MANUAL RESETTING.  
Direct mounting on BF95...BF150 contactors.  
Independent mounting with 11 G270 base.

<b>RFN110 082</b>	60...82	100	200	250	1	0.365
<b>RFN110 095</b>	70...95	100	200	350	1	0.365
<b>RFN110 110</b>	90...110	125	200	350	1	0.365

AUTOMATIC RESETTING.  
Direct mounting on BF40...BF94 contactors.  
Independent mounting with 11 G270 base.

<b>RFNA82 4200</b>	28...42	50	80	150	1	0.365
<b>RFNA82 5000</b>	35...50	50	100	175	1	0.365
<b>RFNA82 6500</b>	46...65	80	125	200	1	0.365
<b>RFNA82 8200</b>	60...82	100	200	250	1	0.365
<b>RFNA82 9500</b>	70...95	100	200	250	1	0.365

AUTOMATIC RESETTING.  
Direct mounting on BF95...BF150 contactors.  
Independent mounting with 11 G270 base.

<b>RFNA110 082</b>	60...82	100	200	250	1	0.365
<b>RFNA110 095</b>	70...95	100	200	350	1	0.365
<b>RFNA110 110</b>	90...110	125	200	350	1	0.365

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

#### Three-phase IEC motor powers <sup>⊗</sup>

230V [kW]	400V [kW]	500V [kW]	690V [kW]
-----------	-----------	-----------	-----------

9-10	15-18.5	22-25	30-33
10-11	22	30	37-40
15-18.5	25-30	33-40	45-55
22	33-40	45-55	59-75
22	33-40	45-55	59-75

22	33-40	45-55	59-75
22-25	40-45	55-63	75-80
30	55	75	90

9-10	15-18.5	22-25	30-33
10-11	22	30	37-40
15-18.5	25-30	33-40	45-55
22	33-40	45-55	59-75
22	33-40	45-55	59-75

22	33-40	45-55	59-75
22-25	40-45	55-63	75-80
30	55	75	90

<sup>⊗</sup> The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

#### Certifications and compliance

Certifications obtained:

Type	cULus	CSA	EAC
RFN82	●	—	●
RFNA82	●	—	●
RFN110	●	—	—
RFNA110	●	—	—

● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 82A FLA range and 10000 Amps RMS for 95A and 110A FLA range; the trip current is 120% FLA.  
CSA – CSA certified for Canada only (File 54332) as Auxiliary Devices for use with magnetic contactors.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

#### FIXING EASE OF THE THERMAL OVERLOAD RELAY

While the thermal overload relay is being linked to the contactor, its auxiliary contact fits on and connects to the coil terminal by rigid terminal. Complete relay fixing is done in a single operation, with no need of other connections.




### 3 Motor protection relays

Thermal overload relays  
for B series contactors

**Phase failure /  
single phase sensitive  
Three poles (three phase)**



RF200... - RF420...

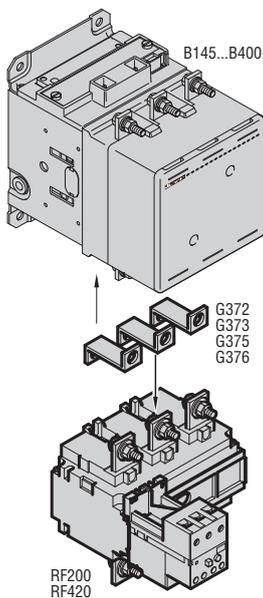

Order code	Adjustment range	Protection fuses			Qty per pkg	Wt [kg]
		IEC aM	gG	UL K5		
	[A]	[A]	[A]	[A]	n°	[kg]

**MANUAL OR AUTOMATIC RESETTING.**

Independent screw fixing or direct mounting on contactors:  
B145-B180 using G372 links.  
B250-B310-B400 using G373 links.

<b>RF200 100</b>	60...100	100	160	500	1	2.150
<b>RF200 125</b>	75...125	125	200	500	1	2.150
<b>RF200 150</b>	90...150	160	250	500	1	2.150
<b>RF200 200</b>	120...200	200	315	500	1	2.150

Independent screw fixing or direct mounting on contactors:  
B145-B180 using G375 links  
B250-B310-B400 using G376 links

<b>RF420 250</b>	150...250	250	400	800	1	2.460
<b>RF420 300</b>	180...300	315	500	800	1	2.460
<b>RF420 420</b>	250...420	500	630	800	1	2.460

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

**RELAYS FOR B500 AND B630 CONTACTORS**

**MANUAL OR AUTOMATIC RESETTING.**

Consult Technical support for the relative order codes and detailed information; see contact details on inside front cover.

**Three-phase IEC motor powers ①**

230V	400V	550V	690V
[kW]	[kW]	[kW]	[kW]

18.5-25	33-51	45-63	59-92
22-37	40-63	55-80	75-110
25-45	51-80	63-100	92-140
37-59	75-100	92-140	129-184

45-75	92-132	110-162	140-220
55-92	100-162	129-198	180-280
75-110	129-198	180-280	250-368

NOTE: For 1000V powers, consult Technical support for information; see contact details on inside front cover.

① The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment

**Certifications and compliance**

Certifications obtained:

Type	C U L u s	E A C
RF200	●	●
RF420	●	●

● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 150A FLA range, 10000 Amps RMS for 200A up to 300A FLA range and 18000 Amps for the 420A; the trip current is 120% FLA.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.


### 3 Motor protection relays

Thermal overload relays  
for B series contactors

**Non phase failure /  
non single phase sensitive  
Three poles (three phase)**



RFN200... - RFN420...

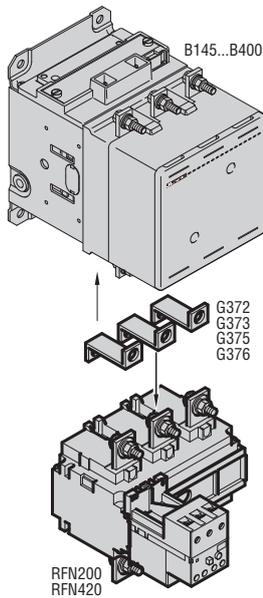

Order code	Adjustment range	Protection fuses			Qty per pkg	Wt [kg]
		IEC aM [A]	gG [A]	UL K5 [A]		
	[A]	[A]	[A]	[A]	n°	

MANUAL OR AUTOMATIC RESETTING.  
Independent screw fixing or direct mounting on contactors:  
B145-B180 using G372 links.  
B250-B310-B400 using G373 links.

<b>RFN200 100</b>	60...100	100	160	500	1	2.150
<b>RFN200 125</b>	75...125	125	200	500	1	2.150
<b>RFN200 150</b>	90...150	160	250	500	1	2.150
<b>RFN200 200</b>	120...200	200	315	500	1	2.150

Independent screw fixing or direct mounting on contactors:  
B145-B180 using G375 links.  
B250-B310-B400 using G376 links.

<b>RFN420 250</b>	150...250	250	400	800	1	2.460
<b>RFN420 300</b>	180...300	315	500	800	1	2.460
<b>RFN420 420</b>	250...420	500	630	800	1	2.460

NOTE: The appropriate adjustment range of the overload relay should be selected on the basis of the motor nameplate full-load current when direct, across the line starting is considered.

#### RELAYS FOR B500 AND B630 CONTACTORS.

MANUAL OR AUTOMATIC RESETTING.  
Consult Technical support for the relative order codes and detailed information; see contact details on inside front cover.

#### Three-phase IEC motor powers ①

230V [kW]	400V [kW]	550V [kW]	690V [kW]
-----------	-----------	-----------	-----------

18.5-25	33-51	45-63	59-92
22-37	40-63	55-80	75-110
25-45	51-80	63-100	92-140
37-59	75-100	92-140	129-184

45-75	92-132	110-162	140-220
55-92	100-162	129-198	180-280
75-110	129-198	180-280	250-368

NOTE: For 1000V powers, consult Technical support for information; see contact details on inside front cover.

① The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

#### Certifications and compliance

Certifications obtained:

Type	C U L u s	E A C
RFN200	●	●
RFN420	●	●

● Certified products.

cULus – UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices – Thermal Overload Relays, 600VAC, open type, ambient compensated, 5000 Amps RMS symmetrical short circuit rating up to 150A FLA range, 10000 Amps RMS for 200A up to 300A FLA range and 18000 Amps for the 420A; the trip current is 120% FLA.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

# 3 Motor protection relays

## Add-on blocks and accessories for thermal overload relays



RFX38 02



RFX38 03



RFX38 04



11 G228

Order code	For relay	Qty per pkg	Wt
		n°	[kg]
Set of links for direct contactor mounting.			
11 G372	RF...200 on B145-B180 contactor	1	0.250
11 G373	RF...200 on B250-B310-B400 contactor	1	0.360
11 G375	RF...420 on B145-B180 contactor	1	0.313
11 G376	RF...420 on B250-B310-B400 contactor	1	0.500
Protection cover for thermal overload relay-contactor assembly.			
RFX38 02	RF38 on contactor BF09-BF12-BF18-BF25	10	0.014
RFX38 03	RF38 on contactor BF26-BF32-BF38	10	0.014
Protection shrouds for power terminals.			
11 G361	RF...200	6	0.026
11 G363	RF...420	6	0.046
Independent mounting.			
Screw fixing or 35mm DIN rail (IEC/EN 60715) mounting.			
RFX38 04	RF...38	5	0.082
11 G270	RF...82 - RF...110	10	0.148
Electrical reset.			
11 G228	RF...9 - RF...82 - RF...110	5	0.072
Sealing device.			
RFX38 01	RF...38 - RF...200 - RF...420	10	0.002
11 G233	RF...9 - RF...82 - RF...110	1	0.006

① Replace with voltage digit.  
Standard voltages are:  
- AC 50/60Hz 24V / 48V / 110-125V / 220-240V / 380-415V.

### Operational characteristics

#### ELECTRICAL RESET G228

Control circuit voltage	V	12...550
AC (50/60Hz)		
Power consumption in AC	VA	300
Minimum reset time	ms	20
Terminals	Faston	6.3x0.8

NOTE: Coils can remain supplied for a maximum interval of 500ms; 3 consecutive operations are allowed, followed by a 5 minute interval. Reset only if at least 1min has passed from overload tripping.

It is recommended to use the wiring diagram on page 3-14.

#### INDEPENDENT MOUNTING

- Conductor cross section with one cable:

- 6...10mm<sup>2</sup> / AWG 8 for RFX38 04
- 35mm<sup>2</sup> / AWG 2 for 11 G270

- Tightening torque:

- 2...2.5Nm / 1.5...1.8lbf for RFX38 04
- 3.9Nm / 2.88lbf for 11 G270.

#### Certifications and compliance

Certifications obtained:


Type	cULus	CSA	EAC
G361-G363-G372-G373-G375-G376	—	●	●
11 G270	●	—	●
RFX38 04	●	—	●

● Certified products.


cULus - UL Listed for USA and Canada (cULus - File E93601) as Auxiliary Devices for thermal overload relays.  
CSA - CSA certified for Canada only (File 54332) as Kits for industrial control equipment.

Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-4-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

#### Combinations

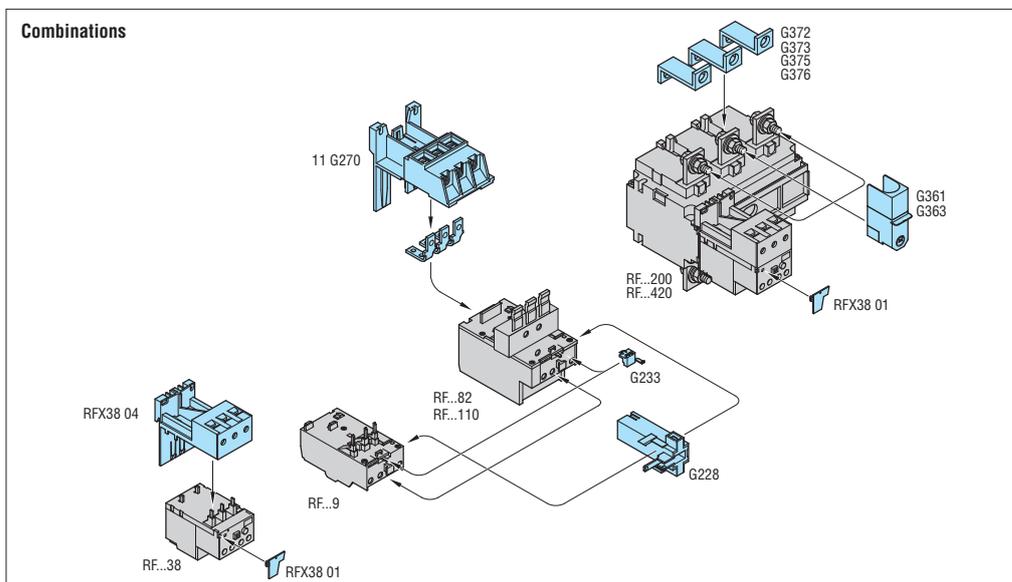

#### Protection cover for thermal overload relay-contactor assembly

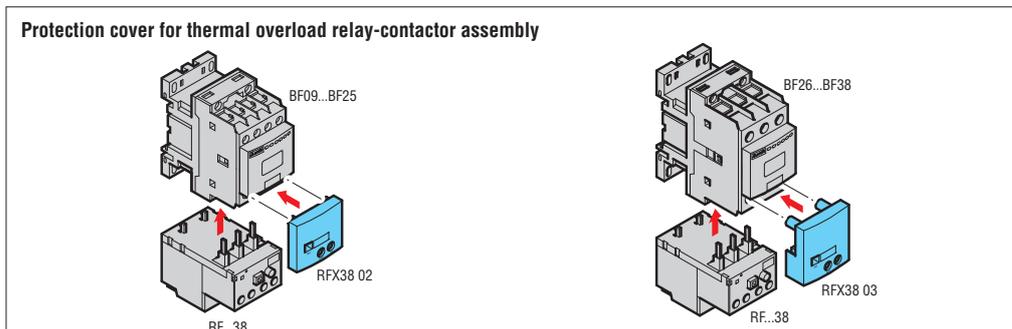

### 3 Motor protection relays

Electronic thermal overload relays for BF series contactors

**Phase failure /  
single phase sensitive  
Three poles (three phase)**



RFE45...

**new**



RFE110

Order code	Adjustment range	Protection fuses			Qty per pkg	Wt [kg]
		IEC aM	gG	UL Class T		
	[A]	[A]	[A]	[A]	n°	

MANUAL OR AUTOMATIC RESETTING.  
Direct mounting on BF09...BF38 contactors.  
Independent mounting with RFX38 04.

<b>RFE45 0200</b>	0.4...2	4	6	125	1	0.195
<b>RFE45 0800</b>	1.6...8	10	20	125	1	0.195
<b>RFE45 3200</b>	6.4...32	40	63	125	1	0.195
<b>RFE45 4500</b>	9...45	50	63	125	1	0.195

MANUAL OR AUTOMATIC RESETTING.  
Independent mounting.

<b>RFE110 110</b>	22...110	125	200	300	1	0.610
-------------------	----------	-----	-----	-----	---	-------

#### Three-phase IEC motor powers ①

230V [kW]	400V [kW]	500V [kW]	690V [kW]
-----------	-----------	-----------	-----------

0.09...0.37	0.12...0.75	0.18...0.75	0.25...1.1
0.37...0.55	0.75...3	1.1...4	1.1...5.5
1.5...7.5	3...15	6.8...28	5.5...30
3...11	4...22	5.5...30	7.5...45

7.5...30	11...55	15...75	22...90
----------	---------	---------	---------

① The indicated powers apply to 4-pole motors; it is advisable to always check that the nameplate motor current is within the relay adjustment range.

#### General characteristics

The RFE... electronic thermal overload relays for BF series contactors are characterized by a wide current adjustment range and high reliability and accuracy of tripping. They are self powered by the main circuit current and therefore do not require separate auxiliary supply voltage. RFE electronic thermal overload relays are suitable for all types of motor starting thanks to the possibility to select several tripping classes. A single front push button is used to select the reset function, manual or automatic, and to activate or deactivate the STOP function.

#### Operational characteristics

- IEC power circuit rated insulation voltage Ui: 1000V
- IEC auxiliary circuit rated insulation voltage Ui: 690V
- rated impulse withstand voltage: 8kV
- rated frequency: 50/60Hz
- maximum rated current: 45A for RFE45, 110A for RFE110
- heat dissipation per phase: <1W
- selectable tripping classes: 5-10-20-30
- phase failure sensitive
- mounting position: any
- sealable current adjuster and dip switches for tripping class selection
- degree of protection: IP20 on front.

#### Certifications and compliance

Certifications obtained: cULus.  
Compliant with standards: IEC/EN 60947-1; IEC/EN 60947-4-1, UL 60947-1, UL 60947-4-1, CSA C22.2 n° 60947-1, CSA C22.2 n° 60947-4-1.

### Thermistor protection relays



31 DRPT...

Order code	Rated auxiliary supply voltage	Qty per pkg	Wt.
	[V]	n°	[kg]
DC supply (version for 35mm DIN rail IEC/EN 60715).			
<b>31 DRPTC 24</b>	24VDC <sup>❶</sup>	1	0.269
AC supply (version for 35mm DIN rail IEC/EN 60715).			
<b>31 DRPT 24</b>	24VAC	1	0.269
<b>31 DRPT 110</b>	110VAC	1	0.269
<b>31 DRPT 220</b>	220...240VAC	1	0.269
Accessories.			
Order code	Description	Qty per pkg	Wt.
		n°	[kg]
<b>31 CE106</b>	Adapter for screw fixing of DRPT relay on mounting plate.	10	0.008

❶ Galvanic isolation between supply and measuring circuits does not exist.

#### General characteristics

The DRPT is a thermal protection relay for motors equipped with thermistor PTC sensors immersed in the winding heads. The maximum number of thermistors to be used is limited by the resistance of all the sensors connected in series; total ohmic value is not to exceed 1.5kΩ at 25°C.

The DRPT type has fail-safe operation: the protective feature trips even in the case the PTC circuit is disconnected or there is a lack of voltage.

Resetting is manual or automatic.

#### Operational characteristics

- Supply circuit:
  - Rated frequency: 50-60Hz for AC types only
  - Operational limits: 0.85...1.1 Us
  - Maximum dissipation: 2.5W
  - Connection: permanent
- Measuring circuit:
  - Type of connectable PTC sensor: According to DIN 44081
  - Total PTC resistance at 25°C: ≤1.5kΩ
  - Tripping resistance: 2.7...3.1kΩ
  - Resetting resistance: 1.5...1.8kΩ
  - Voltage at PTC terminals: ≤ 2.5VDC
- Remote resetting:
  - Control: NC contact opening
  - Contact voltage: 5VDC
  - Current consumption: about 1mA
- Relay output:
  - Arrangement: 1 relay with 2 changeover contacts
  - Rated operational voltage Ue: 250VAC
  - Conventional free air thermal current Ith: 5A
  - Designation to IEC/EN 60947-5-1: B300
  - Mechanical life: 50x10<sup>6</sup> cycles
  - Electrical life (with rated load): 2x10<sup>5</sup> cycles
- Indications:
  - Green LED indicator for power ON
  - Red LED indicator for relay state TRIP
- Connections:
  - Conductor section 2x1.5mm<sup>2</sup> with ferrule (max)
  - Tightening torque: 0.8-1.2Nm
- Ambient conditions:
  - Operating temperature: -10...+60°C
  - Storage temperature: -30...+80°C
- Housing:
  - Snap on 35mm DIN rail (IEC/EN 60715)
  - For screw fixing, use CE106 adapter
  - Degree of protection
    - IP40 housing
    - IP20 terminals.


#### Certifications and compliance

Certifications obtained: EAC.


Compliant with standards: IEC/EN 60255-5.

## ACCESSORIES FOR THERMAL OVERLOAD RELAYS

**RFX38 04** base c/w RF...38 thermal relay

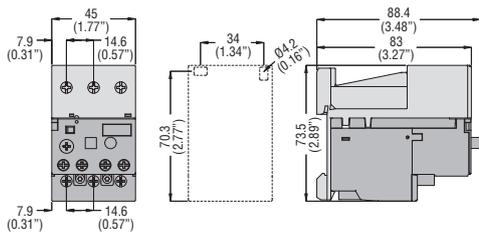


## 11 G270 base c/w RF...82 and RF...110 thermal relay

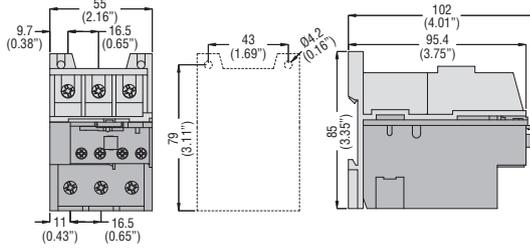


## THERMAL RELAYS WITH LINKS

**RF...200** with G372 and G373

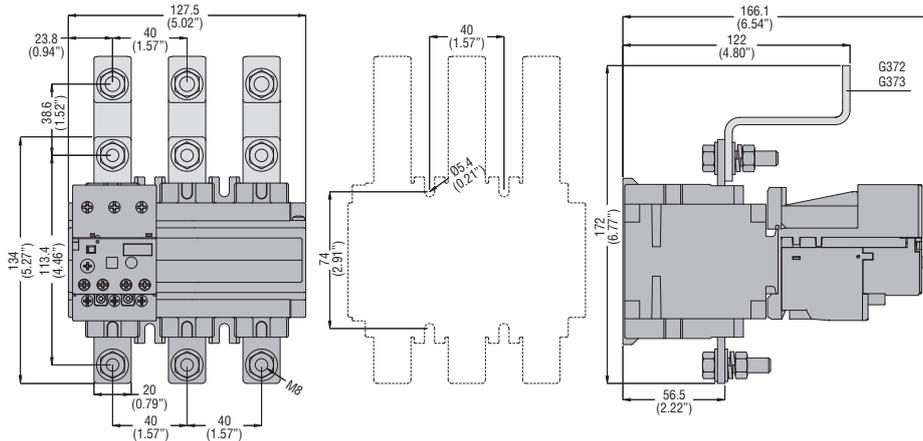

## RF...420


with G375 and G376

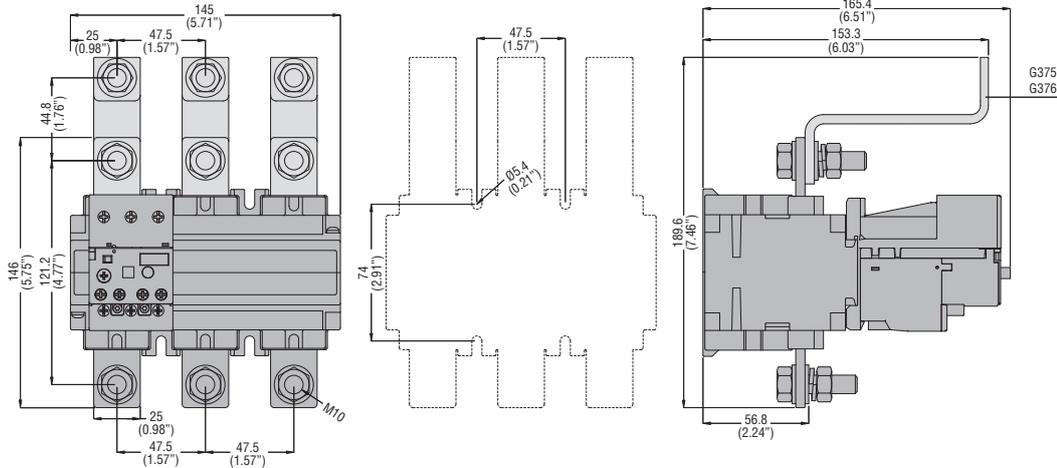

## ADD-ON BLOCKS FOR THERMAL OVERLOAD RELAYS


RF...9, RF...82 and RF...110

**G228...** reset

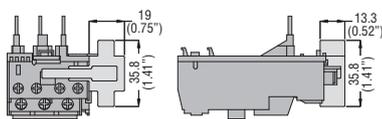


## ELECTRONIC THERMAL OVERLOAD RELAYS

**RFE45**

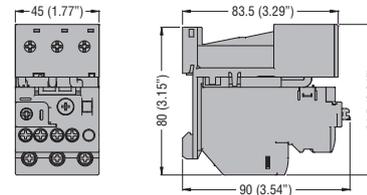


## RFE110

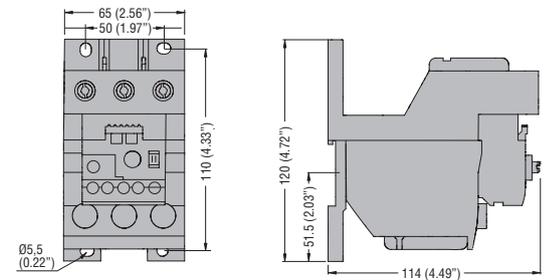


## THERMISTOR PROTECTION RELAYS

**DRPT**

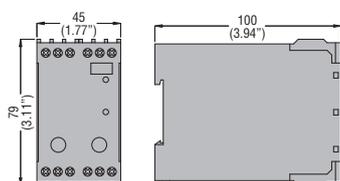


## CE106 adapter




### THERMAL OVERLOAD RELAYS FOR BG MINI-CONTACTORS

#### RF9 - RFN9

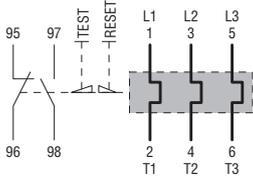


#### RFA9 - RFNA9




### THERMAL OVERLOAD RELAYS FOR BF CONTACTORS


#### RF38 - RFN38

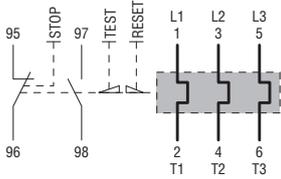

#### RF82 - RFN82 - RF110 - RFN110

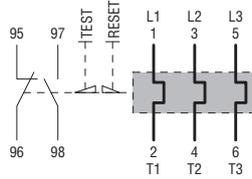


#### RFA82 - RFNA82 - RFA110 - RFNA110



### THERMAL OVERLOAD RELAYS FOR B CONTACTORS


#### RF200 - RFN200

#### RF420 - RFN420

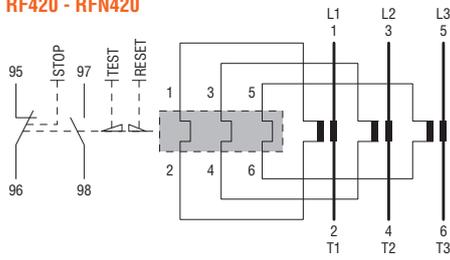


### ADD-ON BLOCKS FOR THERMAL OVERLOAD RELAYS RF9 - RF110

#### Electric reset G228

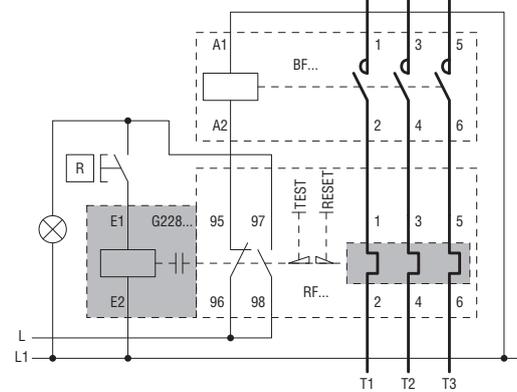



### ELECTRONIC THERMAL OVERLOAD RELAYS

#### RFE45 - RFE110

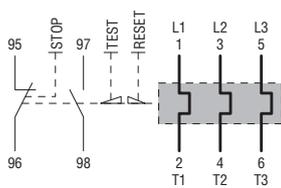

### THERMISTOR PROTECTION RELAYS

#### DRPT

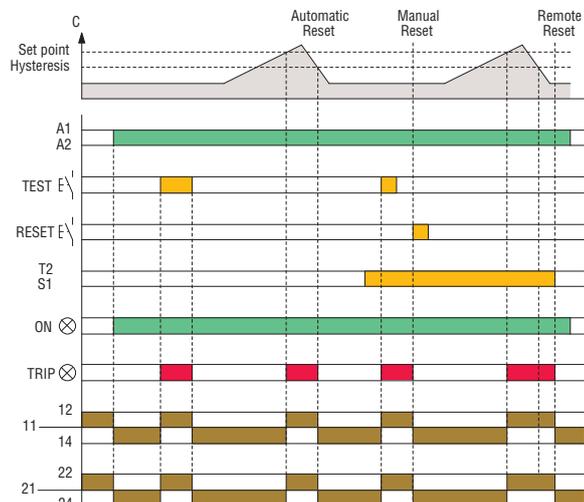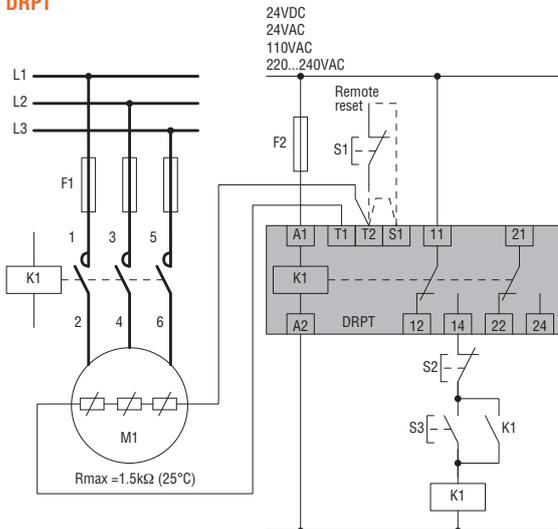

Phase failure/single phase sensitive manual reset	<b>RF9</b>	<b>RF38</b> Ⓚ	<b>RF82-RF110</b>	<b>RFE45</b>	<b>RFE110</b>	<b>RF200</b> Ⓚ	<b>RF420</b> Ⓚ
Phase failure sensitive automatic reset	<b>RFA9</b>	<b>RFN38</b> Ⓚ	<b>RFA82-RFA110</b>			<b>RFN200</b> Ⓚ	<b>RFN420</b> Ⓚ
Non phase failure/non single phase sensitive manual reset	<b>RFN9</b>		<b>RFN82-RFN110</b>				
Non phase failure/non single phase sensitive automatic reset	<b>RFNA9</b>		<b>RFNA82-RFNA110</b>				

### POWER CIRCUIT CHARACTERISTICS

IEC rated insulation voltage $U_i$	V	690	690	690	1000	1000	1000	1000		
IEC rated impulse withstand voltage $U_{imp}$	kV	8Ⓚ	6	8Ⓚ	6	6	6	6		
Frequency limit	Hz	0...400	0...400	0...400	50...60	50...60	50...60	50...60		
Operational range	from	A	0.09	0.1	20	60	0.4	22	60	150
	to	A	15	38	95	110	45	110	200	420Ⓚ
Tripping class		10A			5-10-20-30		10A			
Particular characteristics		Test button - Trip indicator								
Connection		Direct			With current transformersⓀ					
Terminals	Type	Screw and washer		Yoke clamp	Screw and washer	Yoke clamp	Screw and flat washer			
	Screw	M4	M4	M5	M4	M6	M8	M10		
	Terminal width	mm	9.8	12.6	9	12	9	20	25	
Phillips	n°	2	2	2	2	4Ⓚ	13mmⓀ	18mmⓀ		
	Tightening torque for power terminals	Nm	2.3	2...2.5	3.9	3.1	9	18	35	
lbft		1.7	1.5...1.8	2.88	2.3	6.6	13.3	25.9		
	Maximum conductor section connectable									
AWG	N°	10	8	2	6	1/0	-	-		
Flexible w/o lug	mm²	6	10	35	16	50	-	-		
Flexible c/w lug	mm²	10	6	-	10	35	150	2 x 150		
Bar	mm	-	-	-	-	-	25 x 3	30 x 5		
Dissipation per phase	W	0.7...2.4	0.7...2.4	2.0...4.2	<1	<1	0.7...2.4	0.7...2.4		

### AUXILIARY CIRCUIT CHARACTERISTICS

Available contacts	NO	N°	1						
	NC	N°	1						
IEC rated insulation voltage	V	690							
IEC conventional free air thermal current $I_{th}$	A	10			5		10		
Terminals with screw and washer	Screw	M3.5							
	Terminal width	mm	8			7		8	
	Phillips	n°	1	2	1	2	2	2	2
Maximum conductor section connectable	Flexible w/o lug	mm²	2.5						
	Flexible c/w lug	mm²	2.5						
Tightening torque for auxiliary terminals	Nm	1	0.8...1	1	0.8	0.8	0.8...1	0.8...1	
	lbft	0.74	0.59...0.74	0.74	0.6	0.6	0.59...0.74	0.59...0.74	
UL/CSA and IEC/EN 60947-5-1 designation		B600-P600	B600-R300	B600-P600	B600-R300	B600-R300	B600-R300	B600-R300	


### AMBIENT CONDITIONS

Operating temperature	°C	-20...+55	-25...+60	-20...+55	-25...+70	-25...+70	-25...+60	-25...+60
Storage temperature	°C	-55...+70	-50...+70	-55...+70	-55...+80	-55...+80	-50...+70	-50...+70
Compensation temperature	°C	-15...+55	-20...+60	-15...+55	-25...+70	-25...+70	-20...+60	-20...+60
Maximum altitude	m	3000						
Operation position	normal	On vertical plane						
	Allowable	±30°						
Mounting		On contactor or separately (RFE110 separately only)						




- Ⓚ With manual and automatic resetting.
- Ⓚ For currents higher than 420A, consult Technical support for information; see contact details on inside front cover.
- Ⓚ Standard supplied.
- Ⓚ Metric wrench/spanner.
- Ⓚ C600-R300 for automatic reset type.
- Ⓚ Allen key.
- Ⓚ 6kV for auxiliary terminals.

### TRIP CHARACTERISTIC FOR RF THERMAL OVERLOAD RELAYS (AVERAGE TIME)

Three-phase balanced operation

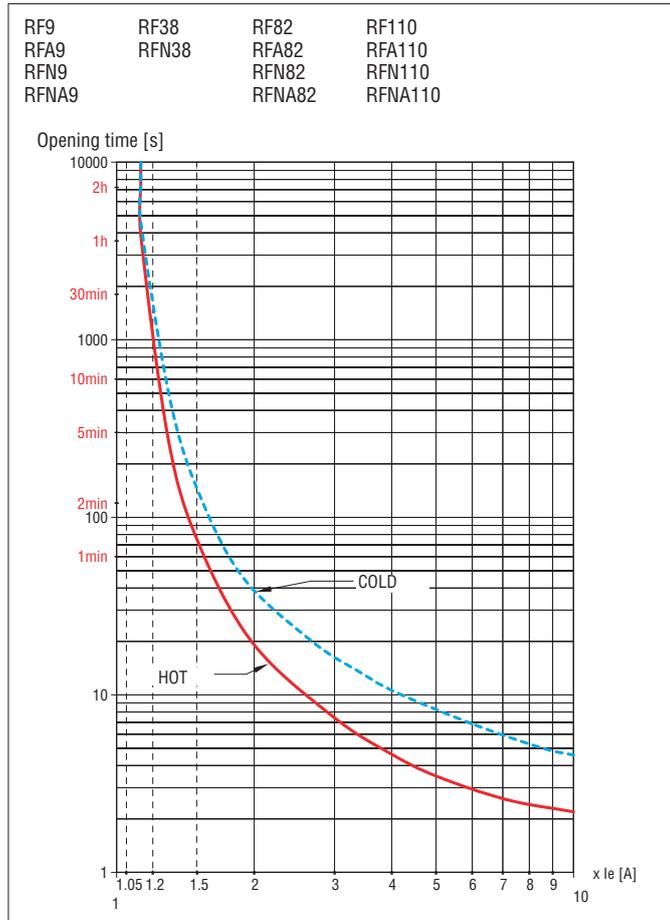


Two-phase operation (phase failure/single phase)

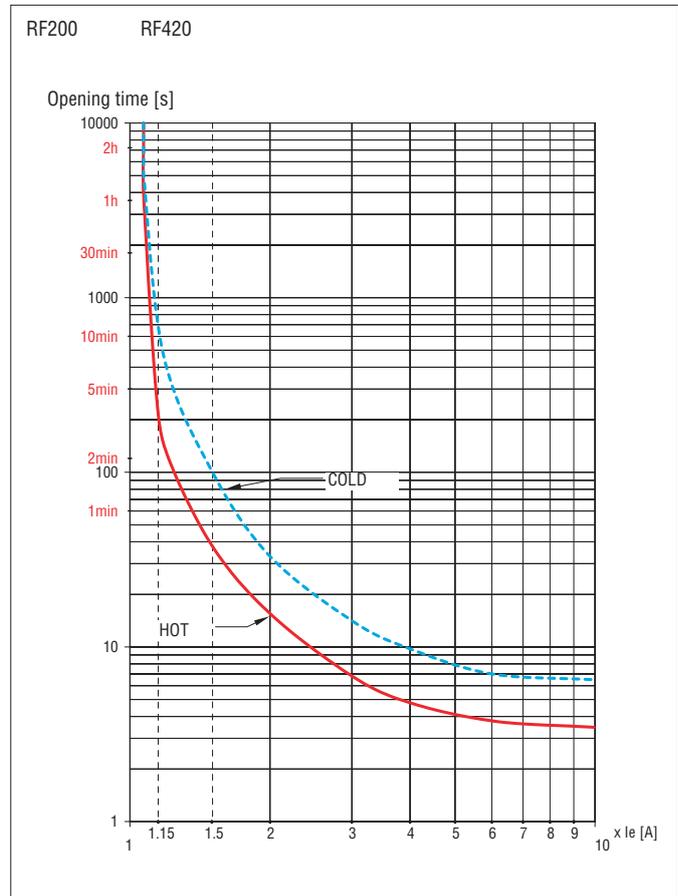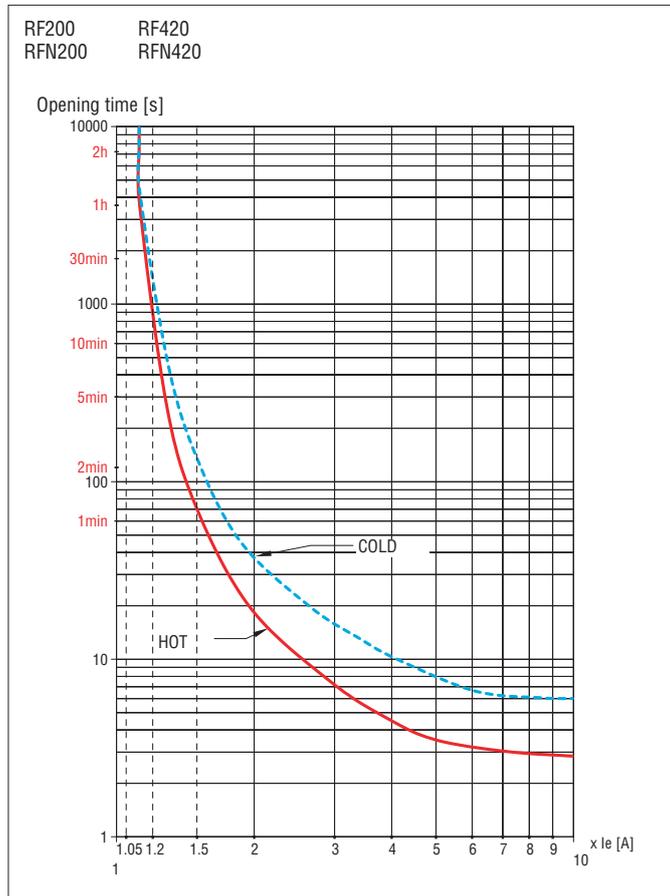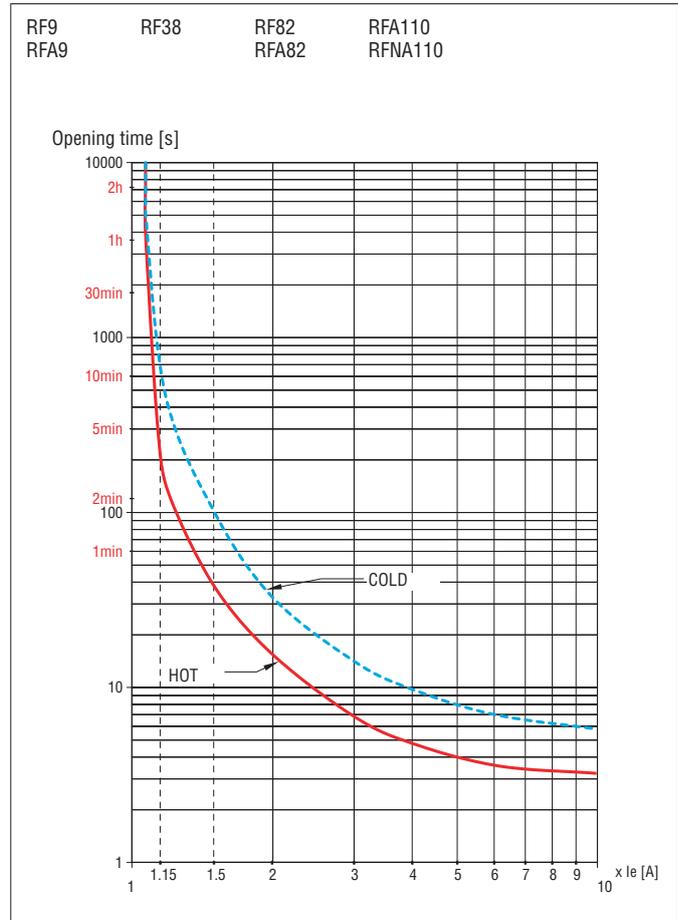


Tripping times can have a ±20% deviation with respect to the average tripping curve values above.

TRIP CHARACTERISTIC FOR RFE ELECTRONIC THERMAL OVERLOAD RELAYS  
Three-phase balanced operation; class 5

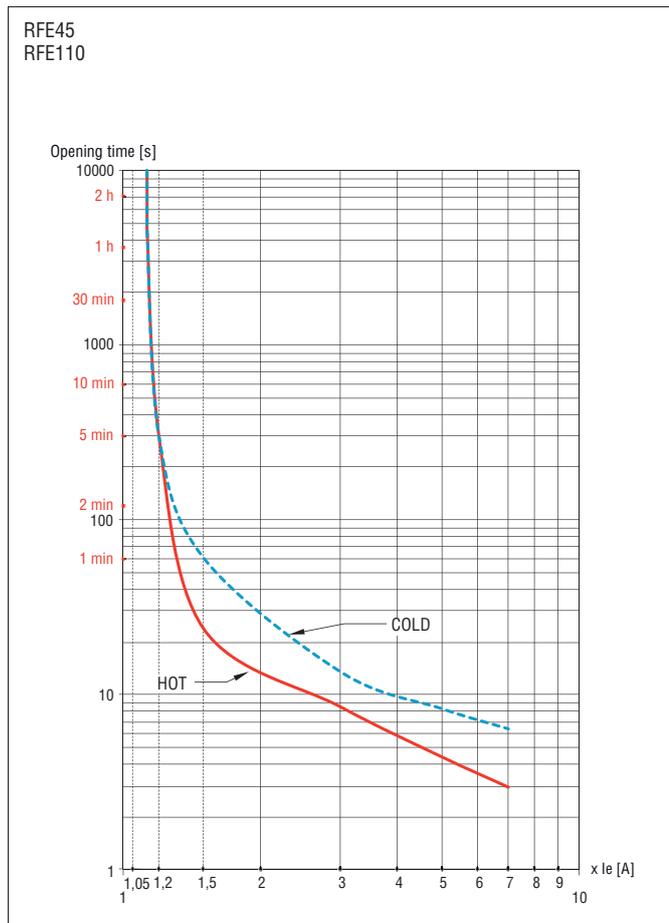


Three-phase balanced operation; class 20

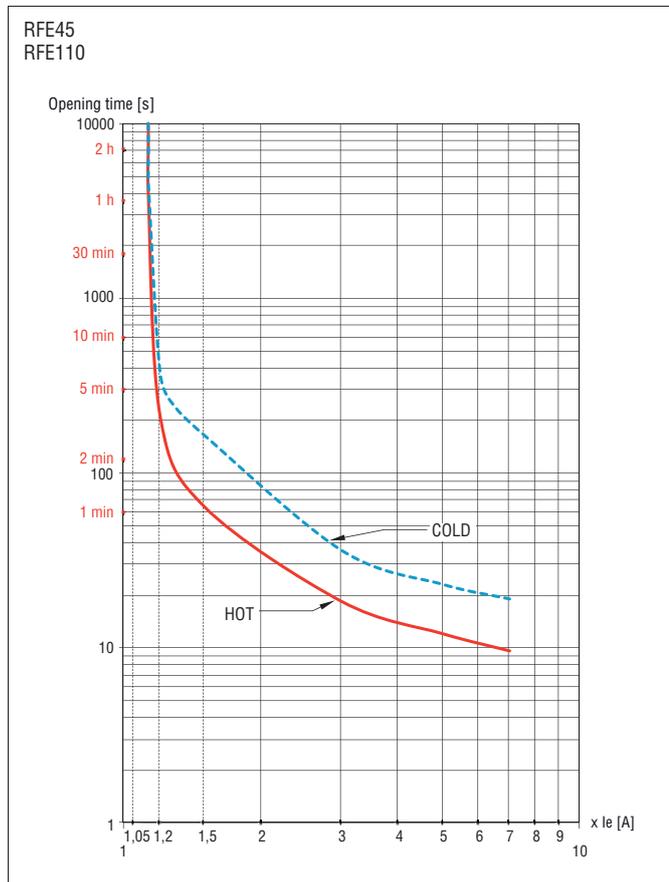

Note: with phase asymmetry >40% tripping in 3s max

Three-phase balanced operation; class 10

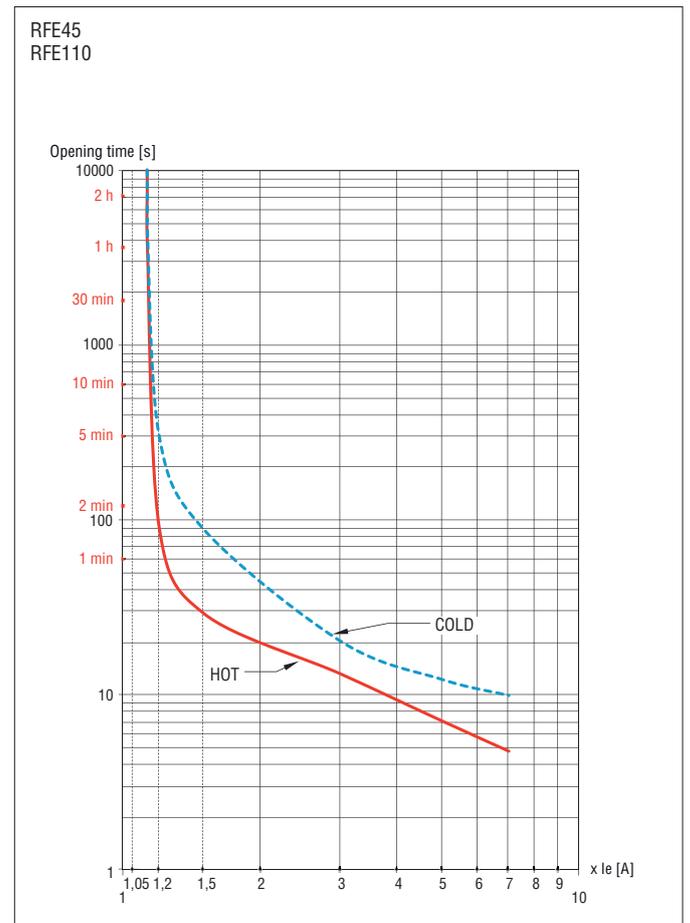

Three-phase balanced operation; class 30

