



Variable frequency drive, 500 V AC, 3-phase, 105 A, 75 kW, IP55/NEMA 12, OLED display, DC link choke

Part no. DA1-35105NB-B55C
Catalog No. 176972
Alternate Catalog No. DA1-35105NB-B55C

Delivery program

Product range			Variable frequency drives
Part group reference (e.g. DIL)			DA1
Rated operational voltage	U_e		500 V AC, 3-phase 600 V AC, 3-phase
Output voltage with V_e	U_2		500 V AC, 3-phase 600 V AC, 3-phase
Mains voltage (50/60Hz)	U_{LN}	V	500 (-10%) - 600 (+10%)
Rated operational current			
At 150% overload	I_e	A	105
Note			Rated operational current at an operating frequency of 4 kHz and an ambient air temperature of +40 °C
Assigned motor rating			
Note			for normal internally and externally ventilated 4 pole, three-phase asynchronous motors with 1500 rpm ⁻¹ at 50 Hz or 1800 min ⁻¹ at 60 Hz
Note			Overload cycle for 60 s every 600 s
Note			at 500 V, 50 Hz
150 % Overload	P	kW	75
150 % Overload	I_M	A	105
Note			at 525 V, 50 Hz
150 % Overload	P	kW	75
150 % Overload	I_M	A	102
Note			at 550 - 600 V, 60 Hz
150 % Overload	P	HP	100
150 % Overload	I_M	A	99
Degree of Protection			IP55/NEMA 12
Interface/field bus (built-in)			OP-Bus (RS485)/Modbus RTU, CANopen®
Fieldbus connection (optional)			Ethernet IP DeviceNet PROFIBUS PROFINET Modbus-TCP EtherCAT SmartWire-DT
Fitted with			Brake chopper OLED display Additional PCB protection DC link choke
Parameterization			Keypad Fieldbus drivesConnect drivesConnect mobile (App)
Frame size			FS6
Connection to SmartWire-DT			yes in conjunction with DX-NET-SWD1 SmartWire DT module

Technical data

General

Standards			Specification for general requirements: IEC/EN 61800-2 EMC requirements: IEC/EN 61800-3
-----------	--	--	--

Certifications			Safety requirements: IEC/EN 61800-5-1
Approvals			CE, UL, cUL, RCM, UkrSEPRO, EAC
Production quality			DNV
Production quality			RoHS, ISO 9001
Climatic proofing	ρ_w	%	< 95%, average relative humidity (RH), non-condensing, non-corrosive
Air quality			3C3, 3S3
Ambient temperature			
Operating ambient temperature min.		°C	-10
Operating ambient temperature max.		°C	+ 40
			operation (with 150 % overload)
Storage	θ	°C	-40 - +60
Mounting position			Vertical
Altitude		m	0 - 1000 m above sea level Above 1000 m: 1% derating for every 100 m max. 4000 m
Degree of Protection			IP55/NEMA 12
Protection against direct contact			BGV A3 (VBG4, finger- and back-of-hand proof)

Main circuit

Supply			
Rated operational voltage	U_e		500 V AC, 3-phase 600 V AC, 3-phase
Mains voltage (50/60Hz)	U_{LN}	V	500 (-10%) - 600 (+10%)
Input current (150% overload)	I_{LN}	A	121.1
System configuration			AC supply systems with earthed center point
Supply frequency	f_{LN}	Hz	50/60
Frequency range	f_{LN}	Hz	48 - 62
Mains switch-on frequency			Maximum of one time every 30 seconds
Power section			
Function			Variable frequency drive with internal DC link, DC link choke and IGBT inverter
Overload current (150% overload)	I_L	A	157.5
max. starting current (High Overload)	I_H	%	200
Note about max. starting current			for 4 seconds every 40 seconds
Output voltage with V_e	U_2		500 V AC, 3-phase 600 V AC, 3-phase
Output Frequency	f_2	Hz	0 - 50/60 (max. 500)
Switching frequency	f_{PWM}	kHz	8 adjustable 4 - 16 (audible)
Operation Mode			U/f control Speed control with slip compensation sensorless vector control (SLV) optional: Vector control with feedback (CLV)
Frequency resolution (setpoint value)	Δf	Hz	0.1
Rated operational current			
At 150% overload	I_e	A	105
Note			Rated operational current at an operating frequency of 4 kHz and an ambient air temperature of +40 °C
Power loss			
Heat dissipation at rated operational current $I_e = 150\%$	P_V	W	2250
Efficiency	η	%	97
Maximum leakage current to ground (PE) without motor	I_{PE}	mA	105
Fitted with			Brake chopper OLED display Additional PCB protection DC link choke
Safety function			STO (Safe Torque Off, SIL2, PLd Cat 3)
Frame size			FS6
Motor feeder			
Note			for normal internally and externally ventilated 4 pole, three-phase asynchronous motors with 1500 rpm^{-1} at 50 Hz or 1800 min^{-1} at 60 Hz
Note			Overload cycle for 60 s every 600 s

Note			at 500 V, 50 Hz
150 % Overload	P	kW	75
Note			at 525 V, 50 Hz
150 % Overload	P	kW	75
Note			at 550 - 600 V, 60 Hz
150 % Overload	P	HP	100
maximum permissible cable length	l	m	screened: 100 screened, with motor choke: 200 unscreened: 150 unscreened, with motor choke: 300
Apparent power			
Apparent power at rated operation 600 V	S	kVA	109.12
Braking function			
Standard braking torque			max. 30 % M_N
DC braking torque			max. 100% of rated operational current I_g , variable
Braking torque with external braking resistance			Max. 100% of rated operational current I_g with external braking resistor
minimum external braking resistance	R_{min}	Ω	8
Switch-on threshold for the braking transistor	U_{DC}	V	975 V DC

Control section

External control voltage	U_c	V	24 V DC (max. 100 mA)
Reference voltage	U_s	V	10 V DC (max. 10 mA)
Analog inputs			2, parameterizable, 0 - 10 V DC, 0/4 - 20 mA
Analog outputs			2, parameterizable, 0 - 10 V, 0/4 - 20 mA
Digital inputs			3, parameterizable, max. 30 VDC, max. 5 for non-parameterized analog inputs
Digital outputs			2, parameterizable, 24 V DC
Relay outputs			2, parameterizable, 1 N/O and 1 changeover contact, 6 A (250 V, AC-1) / 5 A (30 V, DC-1)
Interface/field bus (built-in)			OP-Bus (RS485)/Modbus RTU, CANopen®

Assigned switching and protective elements

Power Wiring			
Safety device (fuse or miniature circuit-breaker)			
IEC (Type B, gG), 150 %			160NHG00B NZMC2-S160
Notes			NH fuse used together with TB00-D fuse base
UL (Class CC or J)		A	160
Notes			LPJ fuse used together with JM60200-3 fuse base
UL (Class CC or J)		A	LPJ-150SP
Mains contactor			
150 % overload (CT/ I_H , at 50 °C)			DILM95
Main choke			
150 % overload (CT/ I_H , at 50 °C)			DX-LN3-120
DC link connection			
Braking resistance			
10 % duty factor (DF)			DX-BR012-18K1
20 % duty factor (DF)			R:2 x DX-BR006-33K3
40 % duty factor (DF)			P:2 x R:3 x DX-BR006-33K3
Notes concerning braking resistances:			P:n = "n" resistors connected in parallel R:m = "m" resistors connected in series The brake resistors are assigned based on the maximum rated power of the variable frequency drive. Additional brake resistors and designs (e.g. different duty cycles) are available upon request.
Motor feeder			
motor choke			
150 % overload (CT/ I_H , at 50 °C)			DX-LM3-150
Sine filter			
150 % overload (CT/ I_H , at 50 °C)			SIN-0122-6-0-P

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	75
Heat dissipation per pole, current-dependent	P_{vid}	W	0
Equipment heat dissipation, current-dependent	P_{vid}	W	2250
Static heat dissipation, non-current-dependent	P_{vs}	W	0
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	-10
Operating ambient temperature max.		°C	40
			Operation (with 150 % overload)
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			
			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			
			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			
			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			
			Meets the product standard's requirements.
10.2.5 Lifting			
			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			
			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			
			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			
			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			
			Meets the product standard's requirements.
10.5 Protection against electric shock			
			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			
			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			
			Is the panel builder's responsibility.
10.8 Connections for external conductors			
			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			
			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			
			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			
			Is the panel builder's responsibility.
10.10 Temperature rise			
			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			
			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			
			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			
			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Frequency converter =< 1 kV (EC001857)			
Electric engineering, automation, process control engineering / Electrical drive / Static frequency converter / Static frequency converter = < 1 kV (ec@ss10.0.1-27-02-31-01 [AKE177014])			
Mains voltage		V	540 - 660
Mains frequency			50/60 Hz
Number of phases input			3
Number of phases output			3
Max. output frequency		Hz	500
Max. output voltage		V	600
Nominal output current I2N		A	105
Max. output at quadratic load at rated output voltage		kW	75
Max. output at linear load at rated output voltage		kW	75
Relative symmetric net frequency tolerance		%	10
Relative symmetric net voltage tolerance		%	10
Number of analogue outputs			2
Number of analogue inputs			2
Number of digital outputs			2

Number of digital inputs			5
With control unit			Yes
Application in industrial area permitted			Yes
Application in domestic- and commercial area permitted			No
Supporting protocol for TCP/IP			Yes
Supporting protocol for PROFIBUS			Yes
Supporting protocol for CAN			Yes
Supporting protocol for INTERBUS			No
Supporting protocol for ASI			No
Supporting protocol for KNX			No
Supporting protocol for MODBUS			Yes
Supporting protocol for Data-Highway			No
Supporting protocol for DeviceNet			Yes
Supporting protocol for SUCONET			No
Supporting protocol for LON			No
Supporting protocol for PROFINET IO			Yes
Supporting protocol for PROFINET CBA			No
Supporting protocol for SERCOS			No
Supporting protocol for Foundation Fieldbus			No
Supporting protocol for EtherNet/IP			Yes
Supporting protocol for AS-Interface Safety at Work			No
Supporting protocol for DeviceNet Safety			No
Supporting protocol for INTERBUS-Safety			No
Supporting protocol for PROFIsafe			No
Supporting protocol for SafetyBUS p			No
Supporting protocol for BACnet			Yes
Supporting protocol for other bus systems			Yes
Number of HW-interfaces industrial Ethernet			0
Number of interfaces PROFINET			0
Number of HW-interfaces RS-232			0
Number of HW-interfaces RS-422			0
Number of HW-interfaces RS-485			1
Number of HW-interfaces serial TTY			0
Number of HW-interfaces USB			0
Number of HW-interfaces parallel			0
Number of HW-interfaces other			0
With optical interface			No
With PC connection			Yes
Integrated breaking resistance			Yes
4-quadrant operation possible			Yes
Type of converter			U converter
Degree of protection (IP)			IP55
Degree of protection (NEMA)			12
Height		mm	868
Width		mm	340
Depth		mm	321.6

Approvals

Product Standards			UL 508C; CSA-C22.2 No. 14; IEC/EN61800-3; IEC/EN61800-5; CE marking
UL File No.			E172143
UL Category Control No.			NMMS, NMMS7
CSA File No.			UL report applies to both US and Canada
North America Certification			UL listed, certified by UL for use in Canada
Specially designed for North America			No
Suitable for			Branch circuits


Max. Voltage Rating

3- 600 V AC (+10 %) IEC: TN-S UL/CSA: "Y" (Solidly Grounded Wey)

Degree of Protection

IEC: IP55

Dimensions

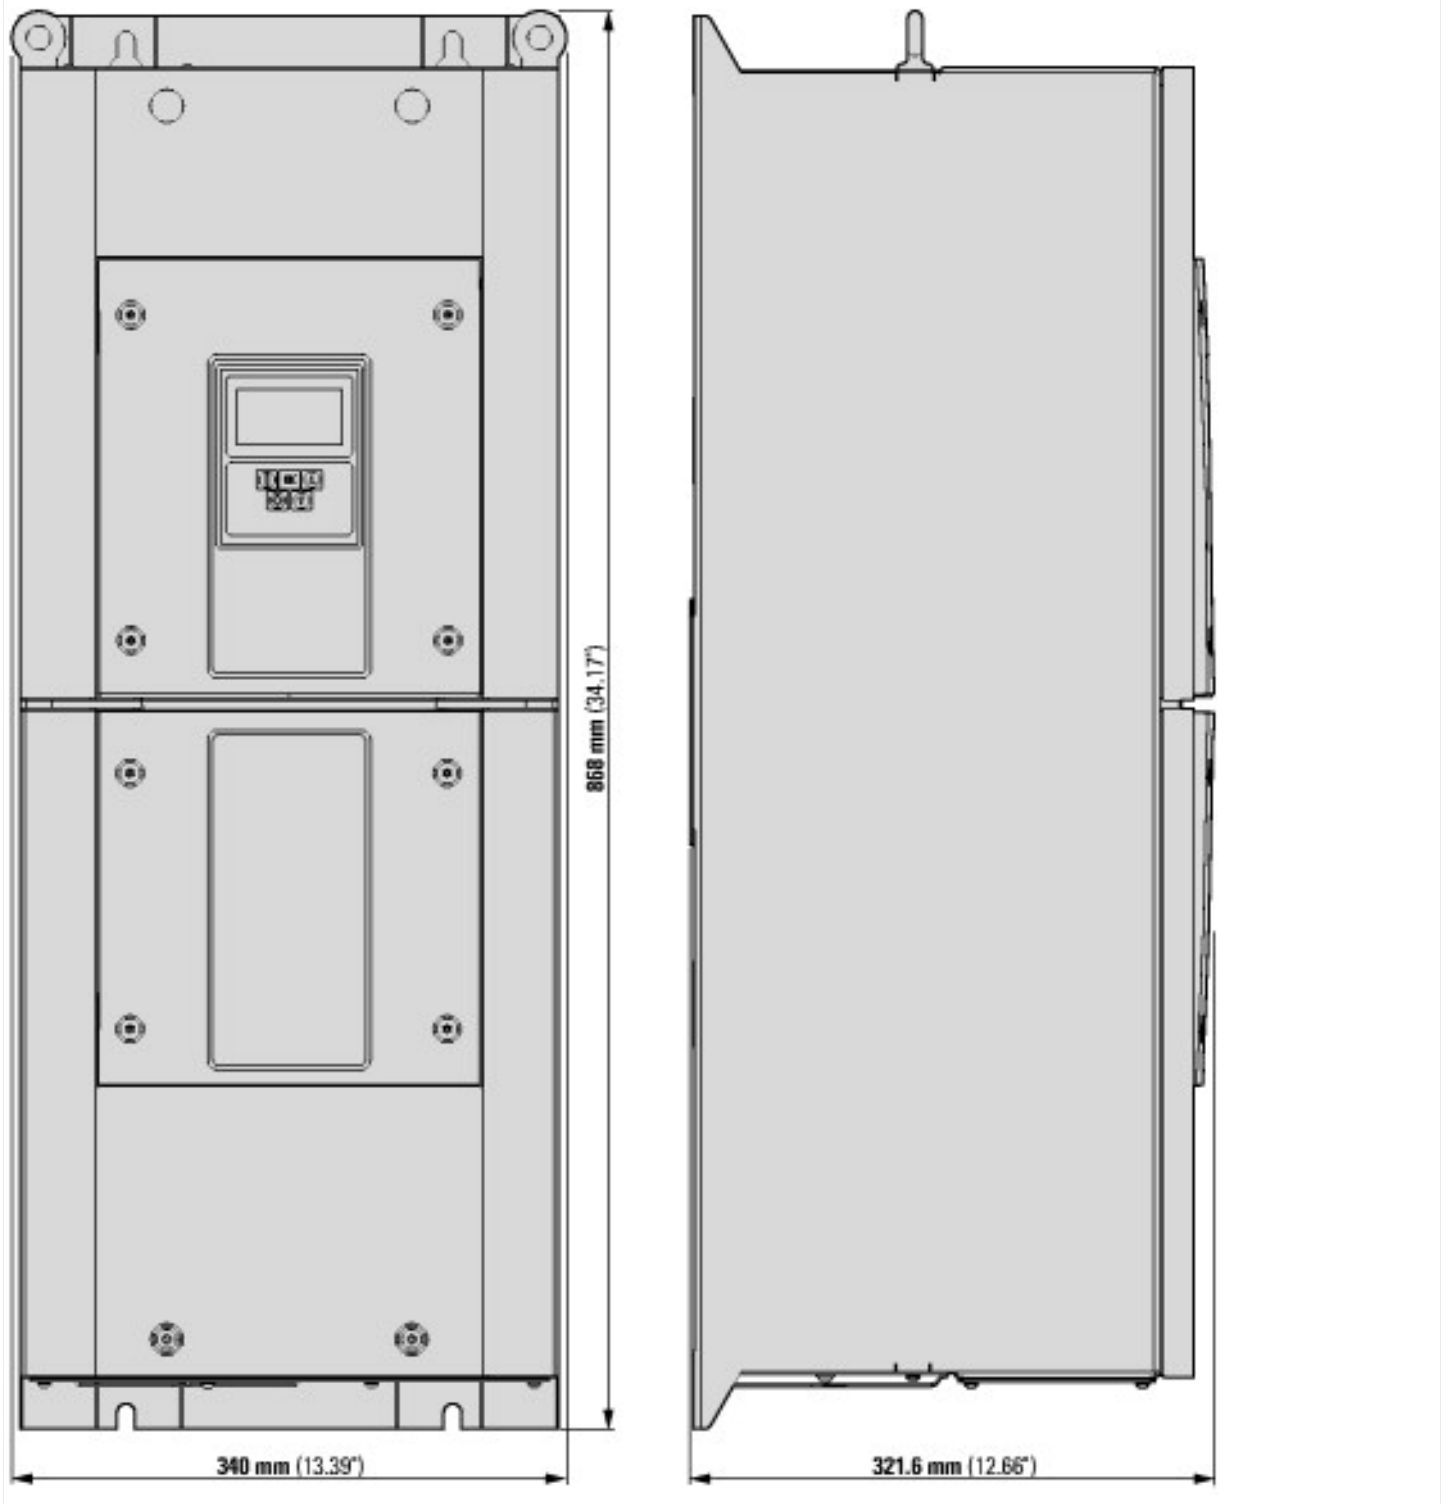

Additional product information (links)

IL04020011Z Variable frequency drives DA1 (FS4 - 7)

IL04020011Z Variable frequency drives DA1 (FS4 - 7) https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL04020011Z2018_04.pdf

MN04020005Z DA1 variable frequency drives, Installation manual

MN04020005Z Frequenzrichter DA1, Installationshandbuch - Deutsch https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN04020005Z_DE.pdf

MN04020005Z DA1 variable frequency drives, Installation manual - English https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN04020005Z_EN.pdf

MN04020005Z Convertitore di frequenza DA1, manuale Installazione - italiano https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN04020005Z_IT.pdf

MN04020006Z DA1 variable frequency drives, Parameters manual

MN04020006Z Frequenzumrichter DA1, Parameterhandbuch - Deutsch	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN04020006Z_DE.pdf
MN04020006Z DA1 variable frequency drives, Parameters manual - English	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN04020006Z_EN.pdf
MN04020006Z Convertitore di frequenza DA1, manuale Parametri - italiano	https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN04020006Z_IT.pdf
CA04020001Z-EN Product Range Catalog: Efficient Engineering for Starting and Controlling Motors	http://www.eaton.eu/DE/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1095238.pdf