## **DATASHEET - NZMS3-VX630-AVE**



NZM3 PXR20 circuit breaker, 630A, 3p, withdrawable unit

Powering Business Worldwide\*

Part no. NZMS3-VX630-AVE Catalog No. 191506

Similar to illustration

# **Delivery program**

Delivery program			
Product range			Circuit-breaker
Protective function			Systems, cable, selectivity and generator protection
Standard/Approval			IEC
Installation type			Withdrawable
Release system			Electronic release
Construction size			NZM3
Description			LSI overload protection and delayed and non-delayed short-circuit protective device R.m.s. value measurement and "thermal memory" USB interface for configuration and test function with Power Xpert Protection Manager software Optionally communication-capable with interface module and internal Modbus RTU module or CAM
Number of poles			3 pole
Standard equipment			Screw connection
Switching capacity			
400/415 V 50 Hz	I <sub>cu</sub>	kA	70
Rated current = rated uninterrupted current			
Rated current = rated uninterrupted current	$I_n = I_u$	Α	630
Setting range			
Overload trip			
中	I <sub>r</sub>	Α	252 - 630
Short-circuit releases			
Non-delayed	$I_i = I_n x \dots$		2-8
Delayed	$I_{sd} = I_r x \dots$		1.5 – 7

### **Technical data**

#### General

deliefal		
Standards		IEC/EN 60947
Protection against direct contact		Finger and back of hand proof to VDE 0106 Part 100
Climatic proofing		Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature		
Ambient temperature, storage	°C	- 40 - + 70
Operation	°C	-25 - +70
Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27	g	20 (half-sinusoidal shock 20 ms)
Safe isolation to EN 61140		
Between auxiliary contacts and main contacts	V AC	500

between the auxiliary contacts		V AC	300
Mounting position		V AC	Vertical and 90° in all directions
Woulding position			With XFI earth-fault release: - NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in unit - NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit: - NZM3, N3: vertical, 90° right/left - NZM4, N4: vertical with remote operator: - NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions
Direction of incoming supply			as required
Degree of protection			as required
Device			In the operating controls area: IP20 (basic degree of protection)
Enclosures			With insulating surround: IP40 With door coupling rotary handle: IP66
Terminations			Tunnel terminal: IP10 Phase isolator and strip terminal: IP00
Other technical data (sheet catalogue)			Temperature dependency, Derating
Circuit-breakers  Rated current = rated uninterrupted current	$I_n = I_u$	Α	630
Rated surge voltage invariability			000
Main contacts	U <sub>imp</sub>	V	8000
Auxiliary contacts		V	6000
Rated operational voltage	Ue	V AC	690
Overvoltage category/pollution degree	0.6	7.0	III/3
Rated insulation voltage	Ui	V	690
Use in unearthed supply systems	- 1	V	≦ 690
Switching capacity			
Rated short-circuit making capacity	I <sub>cm</sub>		
240 V	I <sub>cm</sub>	kA	220
400/415 V	I <sub>cm</sub>	kA	154
440 V 50/60 Hz	I <sub>cm</sub>	kA	143
525 V 50/60 Hz	I <sub>cm</sub>	kA	80
690 V 50/60 H	Ic	kA	50
Rated short-circuit breaking capacity I <sub>cn</sub>	I <sub>cn</sub>		
Icu to IEC/EN 60947 test cycle 0-t-C0	lcu	kA	
240 V 50/60 Hz	I <sub>cu</sub>	kA	100
400/415 V 50/60 Hz	I <sub>cu</sub>	kA	70
440 V 50/60 Hz	I <sub>cu</sub>	kA	65
525 V 50/60 Hz	I <sub>cu</sub>	kA	36
690 V 50/60 Hz	I <sub>cu</sub>	kA	25
Ics to IEC/EN 60947 test cycle 0-t-C0-t-C0	Ics	kA	
240 V 50/60 Hz	I <sub>cs</sub>	kA	100
400/415 V 50/60 Hz	I <sub>cs</sub>	kA	70
440 V 50/60 Hz	I <sub>cs</sub>	kA	65
525 V 50/60 Hz	I <sub>cs</sub>	kA	18
690 V 50/60 Hz	I <sub>cs</sub>	kA	6
			Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker.
Rated short-time withstand current			
t = 0.3 s	I <sub>cw</sub>	kA	3.3
t = 1 s	I <sub>cw</sub>	kA	3.3
Utilization category to IEC/EN 60947-2			A
Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release)	Operations		15000
Lifespan, electrical			

40.4			
AC-1			
400 V 50/60 Hz	Operations		5000
415 V 50/60 Hz	Operations		5000
690 V 50/60 Hz	Operations		3000
Max. operating frequency		Ops/h	60
Total break time at short-circuit		ms	< 10
Terminal capacity			
Standard equipment			Screw connection
Accessories required			NZM3-XAVS
Optional accessories			Box terminal Tunnel terminal connection on rear
Round copper conductor			
Box terminal			
Solid		$\text{mm}^2$	2 x 16
Stranded		mm <sup>2</sup>	1 x (35 - 240) 2 x (25-120)
Tunnel terminal			
Solid		mm <sup>2</sup>	1 x 16
Stranded			
1-hole		mm <sup>2</sup>	1 x (16 - 185)
Bolt terminal and rear-side connection			
Direct on the switch			
Solid		mm <sup>2</sup>	1 x 16
Cond		mm-	2 x 16
Stranded		mm <sup>2</sup>	1 x (25 - 240) 2 x (25 - 240)
Connection width extension		$\text{mm}^2$	
Connection width extension		mm <sup>2</sup>	2 x 300
Al circular conductor			
Tunnel terminal			
Solid		mm <sup>2</sup>	1 x 16
Stranded		111111	
		2	2)
Stranded		mm <sup>2</sup>	1 x (25 - 185) <sup>2)</sup>
Double hole		mm <sup>2</sup>	1 x (50 - 240) 2 x (50 - 240)
Cu strip (number of segments x width x segment thickness)			<sup>2)</sup> Up to 240 mm <sup>2</sup> can be connected depending on the cable manufacturer.
Box terminal	:		0.10.00
	min.	mm	6 x 16 x 0.8
	max.	mm	10 x 24 x 1.0 + 5 x 24 x 1.0
			(2 x) 8 x 24 x 1.0
Bolt terminal and rear-side connection			
Flat copper strip, with holes	min.	mm	6 x 16 x 0.8
Flat copper strip, with holes	max.	mm	10 x 32 x 1.0 + 5 x 32 x 1.0
Connection width extension		mm	(2 x) 10 x 50 x 1.0
Copper busbar (width x thickness)	mm		
Bolt terminal and rear-side connection			
Screw connection			M10
Direct on the switch	min.	mm	20 x 5
	max.	mm	30 x 10 + 30 x 5
Connection width extension		mm	
Connection width extension	max.	mm	2 x (10 x 50)
Control cables			
		$mm^2$	1 x (0.75 - 2.5)

# Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	630
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	119.07
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

### **Technical data ETIM 7.0**


Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013])

Rated permanent current lu       A       60         Rated voltage       V       60-600         Rated short-circuit breaking capacity lcu at 400 V, 50 Hz       kA       70         Overload release current setting       A       25-630         Adjustment range short-term delayed short-circuit release       A       3-7         Adjustment range undelayed short-circuit release       A       2-8         Integrated earth fault protection       B       4-9       8-0         Type of electrical connection of main circuit       Built-in device slide-in technique (withdrawable)       8-0         Suitable for DIN rail (top hat rail) mounting       Built-in device slide-in technique (withdrawable)       8-0         SUM rail (top hat rail) mounting optional       No       9-0         Number of auxiliary contacts as normally closed contact       B       B       9-0         Number of auxiliary contacts as normally open contact       B       B       9-0         Number of auxiliary contacts as change-over contact       B       B       9-0         With switched-off indicator       B       B       9-0         With under voltage release       B       9-0       9-0         With under voltage release       8-0       9-0       9-0         With under volt	protection (eci@ss10.0.1-2/-3/-04-09 [AJZ/16013])		
Rated short-circuit breaking capacity Icu at 400 V, 50 Hz  Noverload release current setting  Agiustment range short-term delayed short-circuit release  Agiustment range undelayed short-circuit ra	Rated permanent current lu	Α	630
Overload release current setting Adjustment range short-term delayed short-circuit release Adjustment range undelayed short-circuit release AA 1.5 - 7  Adjustment range undelayed short-circuit release AA 2 - 8  Integrated earth fault protection Type of electrical connection of main circuit  Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact With switched-off indicator  A 252 - 630  A 1.5 - 7  A 2 - 8  A 2- 8	Rated voltage	V	690 - 690
Adjustment range short-term delayed short-circuit release Adjustment range undelayed short-circuit release A 2 - 8 Integrated earth fault protection No Type of electrical connection of main circuit Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact With switched-off indicator  A 1.5 - 7  Adjustment range short-term delayed short-circuit release A 2 - 8  No Other Other  Other  No Other	Rated short-circuit breaking capacity Icu at 400 V, 50 Hz	kA	70
Adjustment range undelayed short-circuit release Integrated earth fault protection Type of electrical connection of main circuit  Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as change-over contact  With switched-off indicator  A 2 - 8  No  Dither  No  Other  No  No  Other  No  No  Other  No  No  Other  No  No  No  No  No  No  No  No  No  N	Overload release current setting	Α	252 - 630
Integrated earth fault protection Type of electrical connection of main circuit  Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  With switched-off indicator  No  No  No  O  O  O  No  No  No  No  N	Adjustment range short-term delayed short-circuit release	Α	1.5 - 7
Type of electrical connection of main circuit  Device construction  Suitable for DIN rail (top hat rail) mounting  DIN rail (top hat rail) mounting optional  Number of auxiliary contacts as normally closed contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  No  No  No  No  No  No  No  No  No  N	Adjustment range undelayed short-circuit release	Α	2 - 8
Device construction Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  With switched-off indicator  Built-in device slide-in technique (withdrawable)  No  O  O  O  O  O  O  O  O  O  O  O  O  O	Integrated earth fault protection		No
Suitable for DIN rail (top hat rail) mounting DIN rail (top hat rail) mounting optional Number of auxiliary contacts as normally closed contact Number of auxiliary contacts as normally open contact Number of auxiliary contacts as change-over contact No	Type of electrical connection of main circuit		Other
DIN rail (top hat rail) mounting optional  No Number of auxiliary contacts as normally closed contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  Number of auxiliary contacts as change-over contact  No With switched-off indicator  No	Device construction		Built-in device slide-in technique (withdrawable)
Number of auxiliary contacts as normally closed contact  Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  With switched-off indicator  O  No	Suitable for DIN rail (top hat rail) mounting		No
Number of auxiliary contacts as normally open contact  Number of auxiliary contacts as change-over contact  O  With switched-off indicator  No	DIN rail (top hat rail) mounting optional		No
Number of auxiliary contacts as change-over contact  With switched-off indicator  O  No	Number of auxiliary contacts as normally closed contact		0
With switched-off indicator No	Number of auxiliary contacts as normally open contact		0
	Number of auxiliary contacts as change-over contact		0
With under voltage release No	With switched-off indicator		No
	With under voltage release		No


Number of poles	3
Position of connection for main current circuit	Front side
Type of control element	Rocker lever
Complete device with protection unit	Yes
Motor drive integrated	No
Motor drive optional	Yes
Degree of protection (IP)	IP20


## **Characteristics**

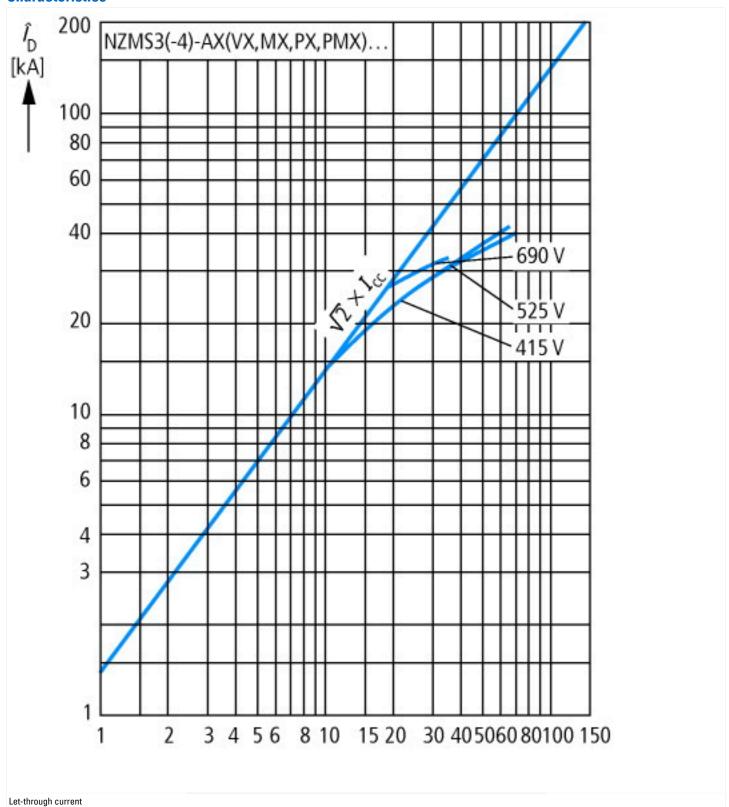

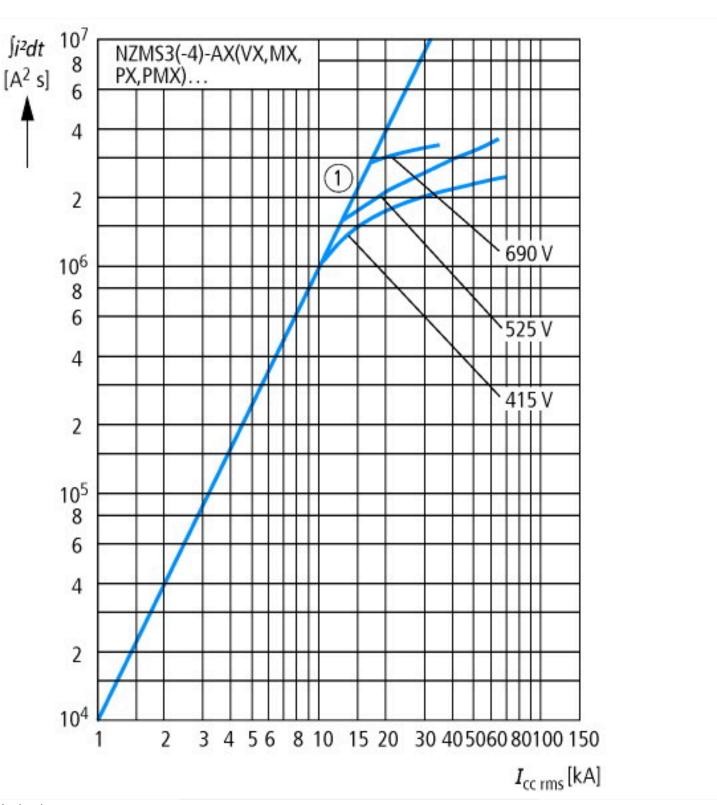

# **Dimensions**

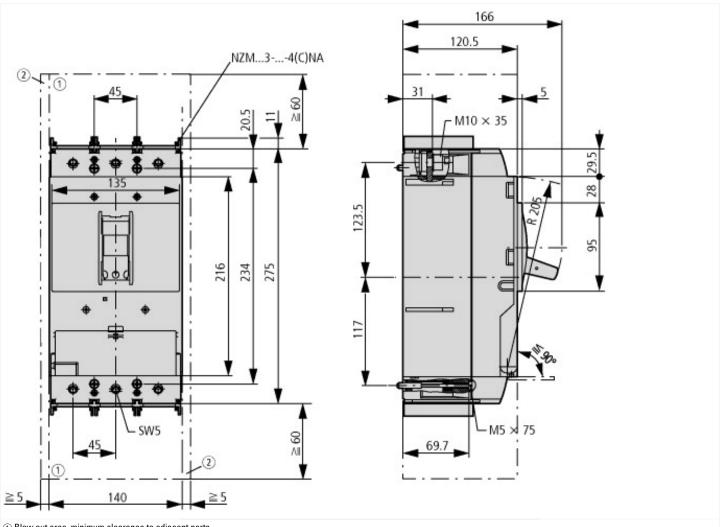

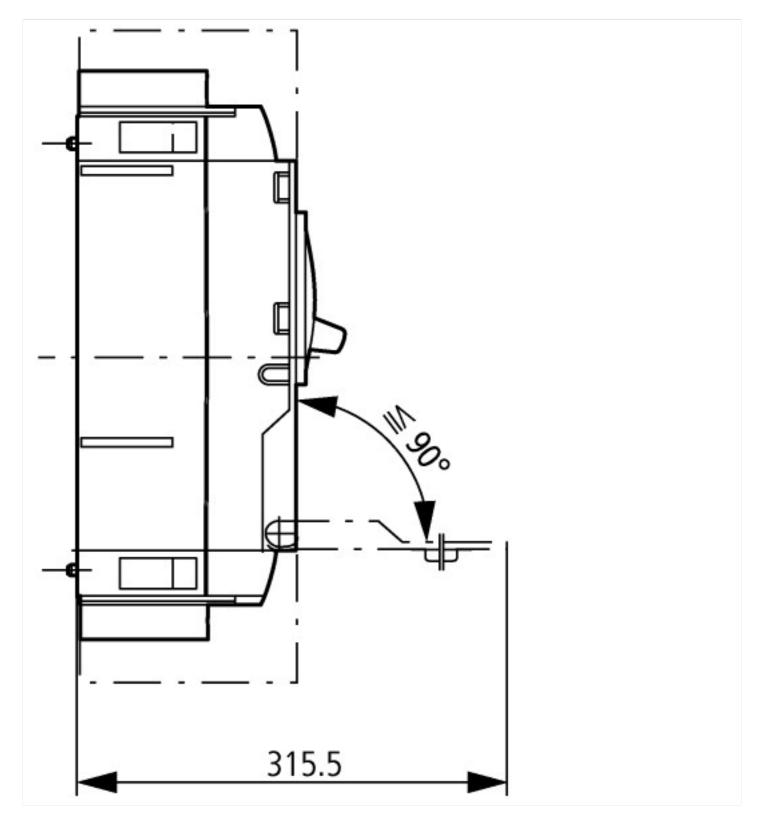

#### Additional product information (links)

Additional product informat	Additional product information (finks)			
IL012100ZU NZM3-PXR circuit-breaker, basic device , NZM3-PXR Circuit-Breaker, basic unit				
IL012100ZU NZM3-PXR circuit-breaker, basic device , NZM3-PXR Circuit-Breaker, basic unit	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL012100ZU2020_10.pdf			
Temperature dependency, Derating	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172			
additional technical information for NZM power switch	https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf			