



**NZM3 PXR20 circuit breaker, 400A, 4p, variable, earth-fault protection, withdrawable unit**

**Part no. NZMS3-4-VX400/VAR-T-AVE**  
**Catalog No. 191538**

Similar to illustration

## Delivery program

|                     |  |  |  |
|---------------------|--|--|--|
| Product range       |  |  | Circuit-breaker  |
| Protective function |  |  | Systems, cable, selectivity and generator protection<br>Earth-fault protection   |
| Standard/Approval   |  |  | IEC  |
| Installation type   |  |  | Withdrawable   |
| Release system      |  |  | Electronic release   |
| Construction size   |  |  | NZM3   |
| Description         |  |  | LSI overload protection and delayed and non-delayed short-circuit protective device<br>R.m.s. value measurement and "thermal memory"<br>USB interface for configuration and test function with Power Xpert Protection Manager software<br>Optionally communication-capable with interface module and internal Modbus RTU module or CAM |
| Number of poles     |  |  | 4 pole   |
| Standard equipment  |  |  | Screw connection   |

## Switching capacity

|                 |          |    |    |
|-----------------|----------|----|----|
| 400/415 V 50 Hz | $I_{cu}$ | kA | 70 |
|-----------------|----------|----|----|

## Rated current = rated uninterrupted current

|   |                      |   |              |
|---|----------------------|---|--------------|
| Rated current = rated uninterrupted current | $I_n = I_u$          | A | 400          |
| Neutral conductor                           | % of phase conductor | % | 0 - 60 - 100 |


## Setting range

|   |                             |   |           |
|---|-----------------------------|---|-----------|
| Overload trip                             |                             |   |           |
|   | $I_r$                       | A | 160 - 400 |
| Short-circuit releases                    |                             |   |           |
|   |                             |   |           |
| Non-delayed                               | $I_i = I_n \times \dots$    |   | 2 - 12    |
|   |                             |   |           |
| Delayed                                   | $I_{sd} = I_r \times \dots$ |   | 2 - 10    |
|   |                             |   |           |
| Setting range of earth fault release min. | $I_g = I_n \times \dots$    |   | 80        |
| Setting range of earth fault release max. | $I_g = I_n \times \dots$    |   | 400       |

## Technical data

### General

|                                   |  |    |  |
|-----------------------------------|--|----|--|
| Standards                         |  |    | IEC/EN 60947   |
| Protection against direct contact |  |    | Finger and back of hand proof to VDE 0106 Part 100                             |
| Climatic proofing                 |  |    | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature               |  |    |  |
| Ambient temperature, storage      |  | °C | - 40 - + 70  |
| Operation                         |  | °C | -25 - +70  |

|   |      |   |
|---|------|---|
| Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27 | g    | 20 (half-sinusoidal shock 20 ms)  |
| Safe isolation to EN 61140  |      |   |
| Between auxiliary contacts and main contacts  | V AC | 500   |
| between the auxiliary contacts  | V AC | 300   |
| Mounting position   |      | <p>Vertical and 90° in all directions</p>  <p>With XFI earth-fault release:</p> <ul style="list-style-type: none"> <li>- NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in unit</li> <li>- NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit:</li> <li>- NZM3, N3: vertical, 90° right/left</li> <li>- NZM4, N4: vertical with remote operator:</li> <li>- NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions</li> </ul> |
| Direction of incoming supply  |      | as required   |
| Degree of protection  |      |   |
| Device  |      | In the operating controls area: IP20 (basic degree of protection)   |
| Enclosures  |      | With insulating surround: IP40<br>With door coupling rotary handle: IP66  |
| Terminations  |      | Tunnel terminal: IP10<br>Phase isolator and strip terminal: IP00  |
| Other technical data (sheet catalogue)  |      | Temperature dependency, Derating  |

### Circuit-breakers

|   |             |      |            |
|---|-------------|------|------------|
| Rated current = rated uninterrupted current | $I_n = I_u$ | A    | 400        |
| Rated surge voltage invariability           | $U_{imp}$   |      |            |
| Main contacts                               |             | V    | 8000       |
| Auxiliary contacts                          |             | V    | 6000       |
| Rated operational voltage                   | $U_e$       | V AC | 690        |
| Overvoltage category/pollution degree       |             |      | III/3      |
| Rated insulation voltage                    | $U_i$       | V    | 690        |
| Use in unearthed supply systems             |             | V    | $\leq 690$ |

### Switching capacity

|   |          |    |   |
|---|----------|----|---|
| Rated short-circuit making capacity             | $I_{cm}$ |    |   |
| 240 V   | $I_{cm}$ | kA | 220   |
| 400/415 V                                       | $I_{cm}$ | kA | 154   |
| 440 V 50/60 Hz                                  | $I_{cm}$ | kA | 143   |
| 525 V 50/60 Hz                                  | $I_{cm}$ | kA | 80  |
| 690 V 50/60 H                                   | $I_c$    | kA | 50  |
| Rated short-circuit breaking capacity $I_{cn}$  | $I_{cn}$ |    |   |
| $I_{cu}$ to IEC/EN 60947 test cycle O-t-CO      | $I_{cu}$ | kA |   |
| 240 V 50/60 Hz                                  | $I_{cu}$ | kA | 100   |
| 400/415 V 50/60 Hz                              | $I_{cu}$ | kA | 70  |
| 440 V 50/60 Hz                                  | $I_{cu}$ | kA | 65  |
| 525 V 50/60 Hz                                  | $I_{cu}$ | kA | 36  |
| 690 V 50/60 Hz                                  | $I_{cu}$ | kA | 25  |
| $I_{cs}$ to IEC/EN 60947 test cycle O-t-CO-t-CO | $I_{cs}$ | kA |   |
| 240 V 50/60 Hz                                  | $I_{cs}$ | kA | 100   |
| 400/415 V 50/60 Hz                              | $I_{cs}$ | kA | 70  |
| 440 V 50/60 Hz                                  | $I_{cs}$ | kA | 65  |
| 525 V 50/60 Hz                                  | $I_{cs}$ | kA | 18  |
| 690 V 50/60 Hz                                  | $I_{cs}$ | kA | 6   |
|   |          |    | Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker. |
| Rated short-time withstand current              |          |    |   |
| $t = 0.3$ s                                     | $I_{cw}$ | kA | 3.3   |
| $t = 1$ s                                       | $I_{cw}$ | kA | 3.3   |

|   |            |       |       |
|---|------------|-------|-------|
| Utilization category to IEC/EN 60947-2                                      |            |       | A     |
| Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release) | Operations |       | 15000 |
| Lifespan, electrical  |            |       |       |
| AC-1  |            |       |       |
| 400 V 50/60 Hz  | Operations |       | 5000  |
| 415 V 50/60 Hz  | Operations |       | 5000  |
| 690 V 50/60 Hz  | Operations |       | 3000  |
| Max. operating frequency  |            | Ops/h | 60    |
| Total break time at short-circuit   |            | ms    | < 10  |

### Terminal capacity

|   |      |                 |   |
|---|------|-----------------|---|
| Standard equipment  |      |                 | Screw connection  |
| Accessories required                                      |      |                 | NZM3-4-XAVS   |
| Optional accessories                                      |      |                 | Box terminal<br>Tunnel terminal<br>connection on rear   |
| Round copper conductor                                    |      |                 |   |
| Box terminal  |      |                 |   |
| Solid   |      | mm <sup>2</sup> | 2 x 16  |
| Stranded  |      | mm <sup>2</sup> | 1 x (35 - 240)<br>2 x (25-120)  |
| Tunnel terminal   |      |                 |   |
| Solid   |      | mm <sup>2</sup> | 1 x 16  |
| Stranded  |      |                 |   |
| 1-hole  |      | mm <sup>2</sup> | 1 x (16 - 185)  |
| Bolt terminal and rear-side connection                    |      |                 |   |
| Direct on the switch                                      |      |                 |   |
| Solid   |      | mm <sup>2</sup> | 1 x 16<br>2 x 16  |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 240)<br>2 x (25 - 240)  |
| Connection width extension                                |      | mm <sup>2</sup> |   |
| Connection width extension                                |      | mm <sup>2</sup> | 2 x 300   |
| Al circular conductor                                     |      |                 |   |
| Tunnel terminal   |      |                 |   |
| Solid   |      | mm <sup>2</sup> | 1 x 16  |
| Stranded  |      |                 |   |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 185) <sup>2)</sup>  |
| Double hole   |      | mm <sup>2</sup> | 1 x (50 - 240)<br>2 x (50 - 240)  |
|   |      |                 | <sup>2)</sup> Up to 240 mm <sup>2</sup> can be connected depending on the cable manufacturer. |
| Cu strip (number of segments x width x segment thickness) |      |                 |   |
| Box terminal  |      |                 |   |
|   | min. | mm              | 6 x 16 x 0.8  |
|   | max. | mm              | 10 x 24 x 1.0<br>+ 5 x 24 x 1.0<br>(2 x) 8 x 24 x 1.0   |
| Bolt terminal and rear-side connection                    |      |                 |   |
| Flat copper strip, with holes                             | min. | mm              | 6 x 16 x 0.8  |
| Flat copper strip, with holes                             | max. | mm              | 10 x 32 x 1.0 + 5 x 32 x 1.0  |
| Connection width extension                                |      | mm              | (2 x) 10 x 50 x 1.0   |
| Copper busbar (width x thickness)                         | mm   |                 |   |
| Bolt terminal and rear-side connection                    |      |                 |   |
| Screw connection  |      |                 | M10   |
| Direct on the switch                                      |      |                 |   |
|   | min. | mm              | 20 x 5  |
|   | max. | mm              | 30 x 10<br>+ 30 x 5   |
| Connection width extension                                |      | mm              |   |

|                            |      |                 |                                      |
|----------------------------|------|-----------------|--------------------------------------|
| Connection width extension | max. | mm              | 2 x (10 x 50)                        |
| Control cables             |      |                 |                                      |
|                            |      | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 1.5) |

## Design verification as per IEC/EN 61439


| Technical data for design verification   |                  |    |  |
|--|------------------|----|--|
| Rated operational current for specified heat dissipation   | I <sub>n</sub>   | A  | 400  |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub> | W  | 48   |
| Operating ambient temperature min.   |                  | °C | -25  |
| Operating ambient temperature max.   |                  | °C | 70   |
| IEC/EN 61439 design verification   |                  |    |  |
| 10.2 Strength of materials and parts   |                  |    |  |
| 10.2.2 Corrosion resistance  |                  |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                  |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                  |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                  |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                  |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |                  |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |                  |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |                  |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |                  |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |                  |    |  |
| 10.9.2 Power-frequency electric strength   |                  |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |                  |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |                  |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |                  |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |                  |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0


| Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)  |  |    |   |
|--|--|----|---|
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ec@ss10.0.1-27-37-04-09 [AJZ716013]) |  |    |   |
| Rated permanent current I <sub>u</sub>   |  | A  | 400   |
| Rated voltage  |  | V  | 690 - 690   |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, 50 Hz  |  | kA | 70  |
| Overload release current setting   |  | A  | 160 - 400   |
| Adjustment range short-term delayed short-circuit release  |  | A  | 2 - 10  |
| Adjustment range undelayed short-circuit release   |  | A  | 2 - 12  |
| Integrated earth fault protection  |  |    | Yes   |
| Type of electrical connection of main circuit  |  |    | Other   |
| Device construction  |  |    | Built-in device slide-in technique (withdrawable) |
| Suitable for DIN rail (top hat rail) mounting  |  |    | No  |
| DIN rail (top hat rail) mounting optional  |  |    | No  |
| Number of auxiliary contacts as normally closed contact  |  |    | 0   |
| Number of auxiliary contacts as normally open contact  |  |    | 0   |

|   |  |              |
|---|--|--------------|
| Number of auxiliary contacts as change-over contact |  | 0            |
| With switched-off indicator                         |  | No           |
| With under voltage release                          |  | No           |
| Number of poles                                     |  | 4            |
| Position of connection for main current circuit     |  | Front side   |
| Type of control element                             |  | Rocker lever |
| Complete device with protection unit                |  | Yes          |
| Motor drive integrated                              |  | No           |
| Motor drive optional                                |  | Yes          |
| Degree of protection (IP)                           |  | IP20         |

## Characteristics

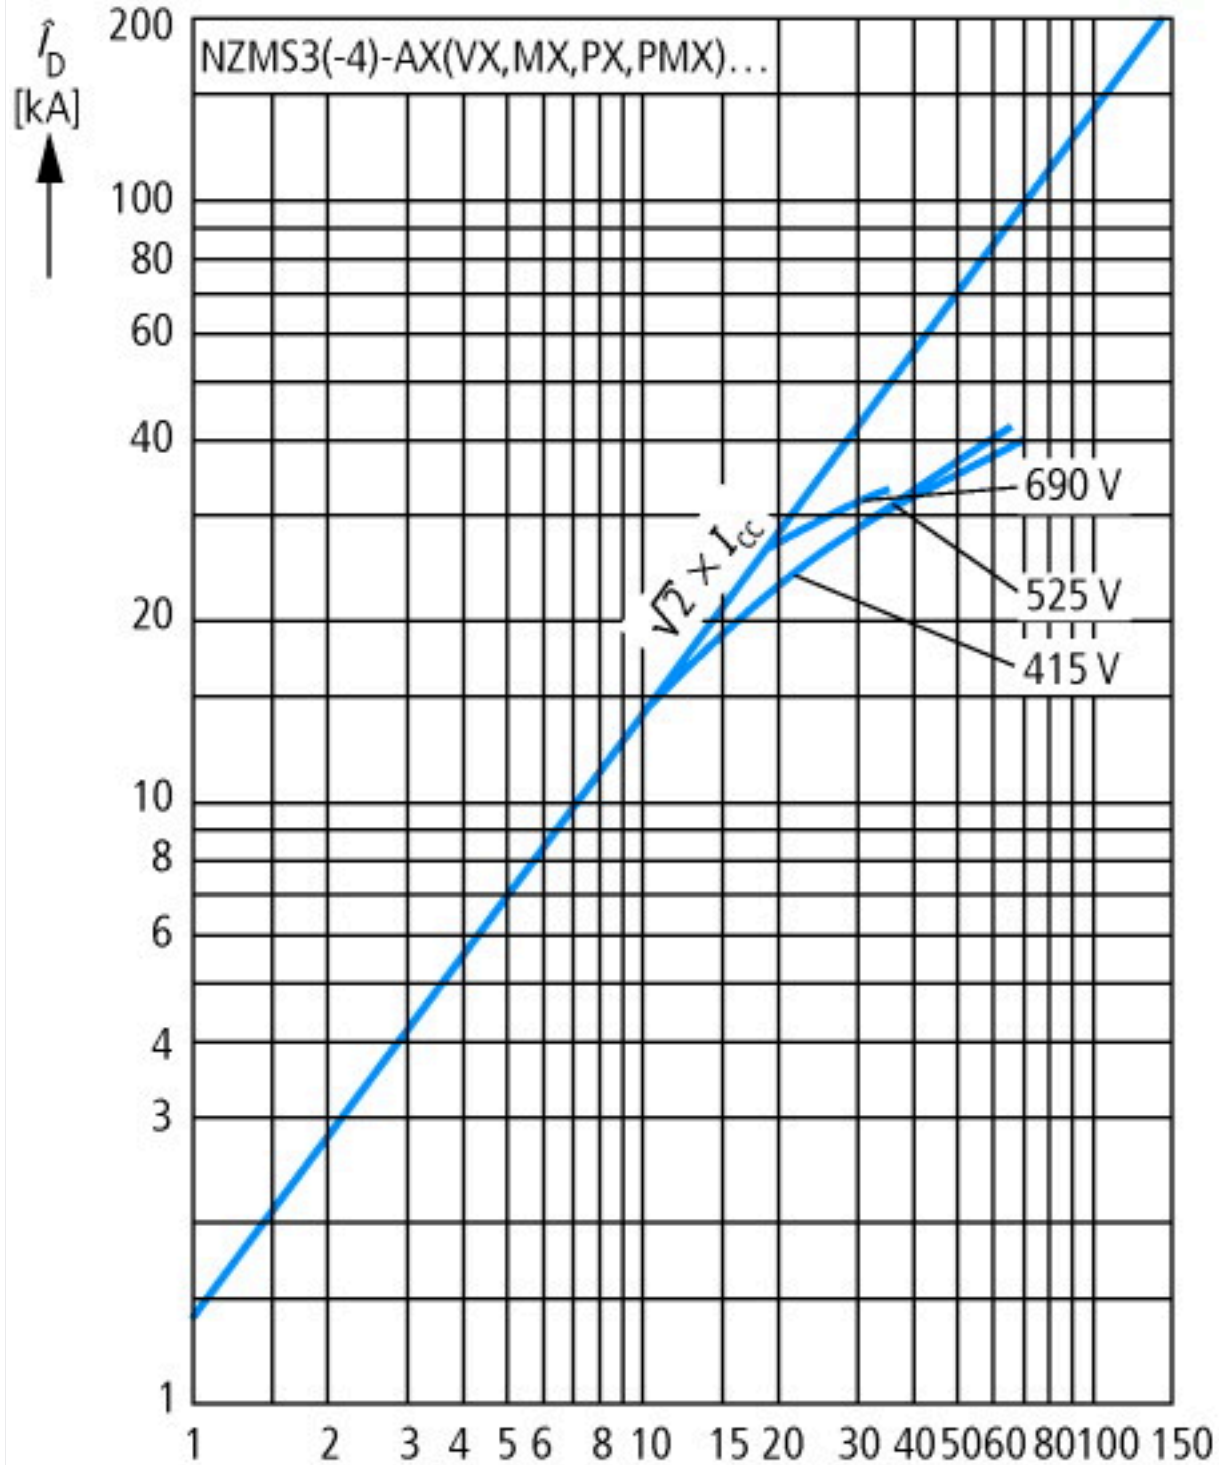


Let-through current

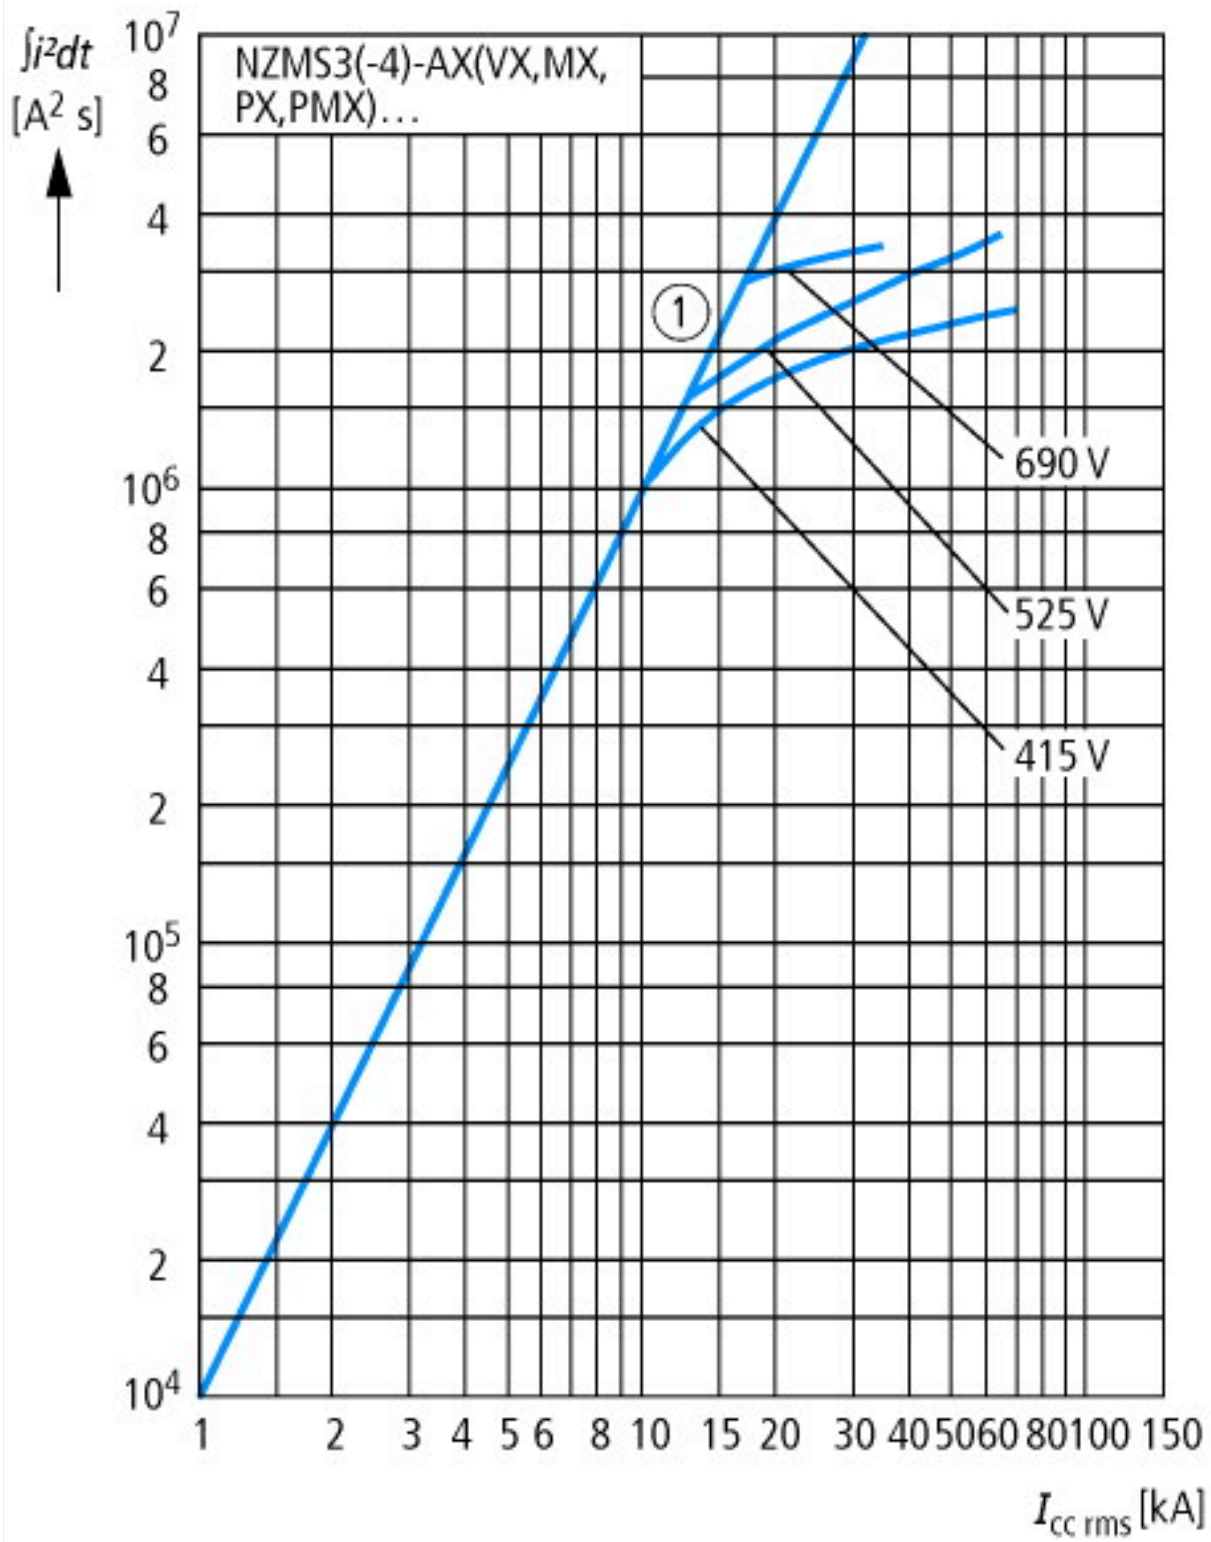

Let-through energy

## Dimensions

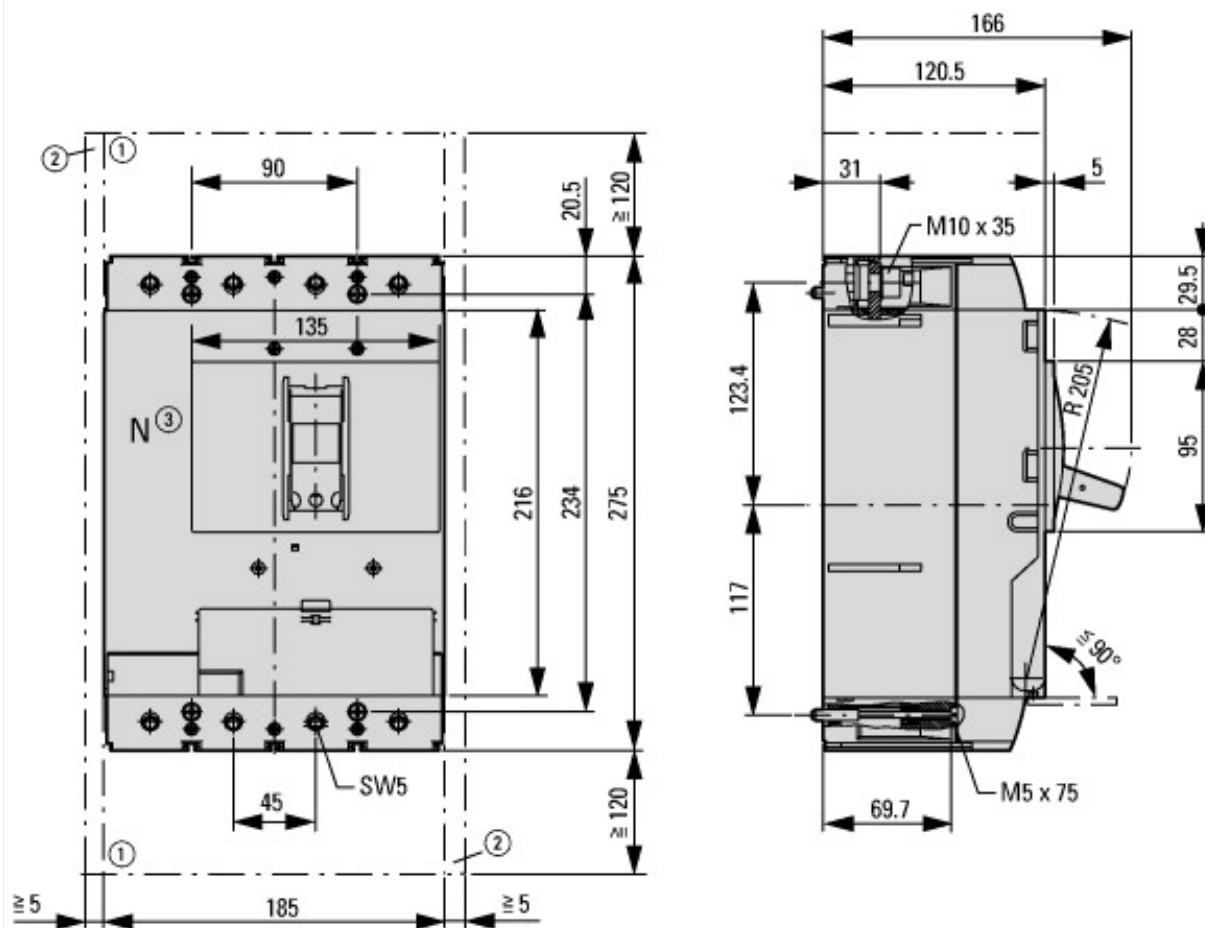

- ① Blow out area, minimum clearance to adjacent parts
- ② Minimum clearance to adjacent parts



### Additional product information (links)

#### IL012100ZU NZM3-PXR circuit-breaker, basic device , NZM3-PXR Circuit-Breaker, basic unit

IL012100ZU NZM3-PXR circuit-breaker, basic device , NZM3-PXR Circuit-Breaker, basic unit

[https://es-assets.eaton.com/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL012100ZU2020\\_10.pdf](https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL012100ZU2020_10.pdf)

Temperature dependency, Derating

<http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172>

additional technical information for NZM power switch

[https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm\\_technic\\_de\\_en.pdf](https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf)