



Phase isolator, 3p, size 3

Part no. NZM3-XKP
Catalog No. 100512

EL-Nummer (Norway) 0004315503

Delivery program

Number of conductors			3 pole
Accessories			Phase isolators
For use with			NZM3(-4), PN3(-4), N(S)3(-4)

Notes

Type contains parts for a terminal located at top or bottom for 3 or 4 pole circuit-breakers.

Included with the connection width extension.

Cannot be combined with the NZM3(-4)-XKA tunnel terminal, NZM3(-4)-XKR connection on rear.

Insulation protection with connection of cable lugs, busbars or braid.

Design verification as per IEC/EN 61439

IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0


Low-voltage industrial components (EG000017) / Phase separation plate for power circuit breaker (EC002035)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Phase separation plate for circuit breaker (ec1@ss10.0.1-27-37-04-25 [ACN959011])			
Model			Other

Approvals

Product Standards			UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
-------------------	--	--	-------------------------------------------------

UL File No.	E31593
UL Category Control No.	DIHS
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Suitable for	Refer to main component information

Dimensions

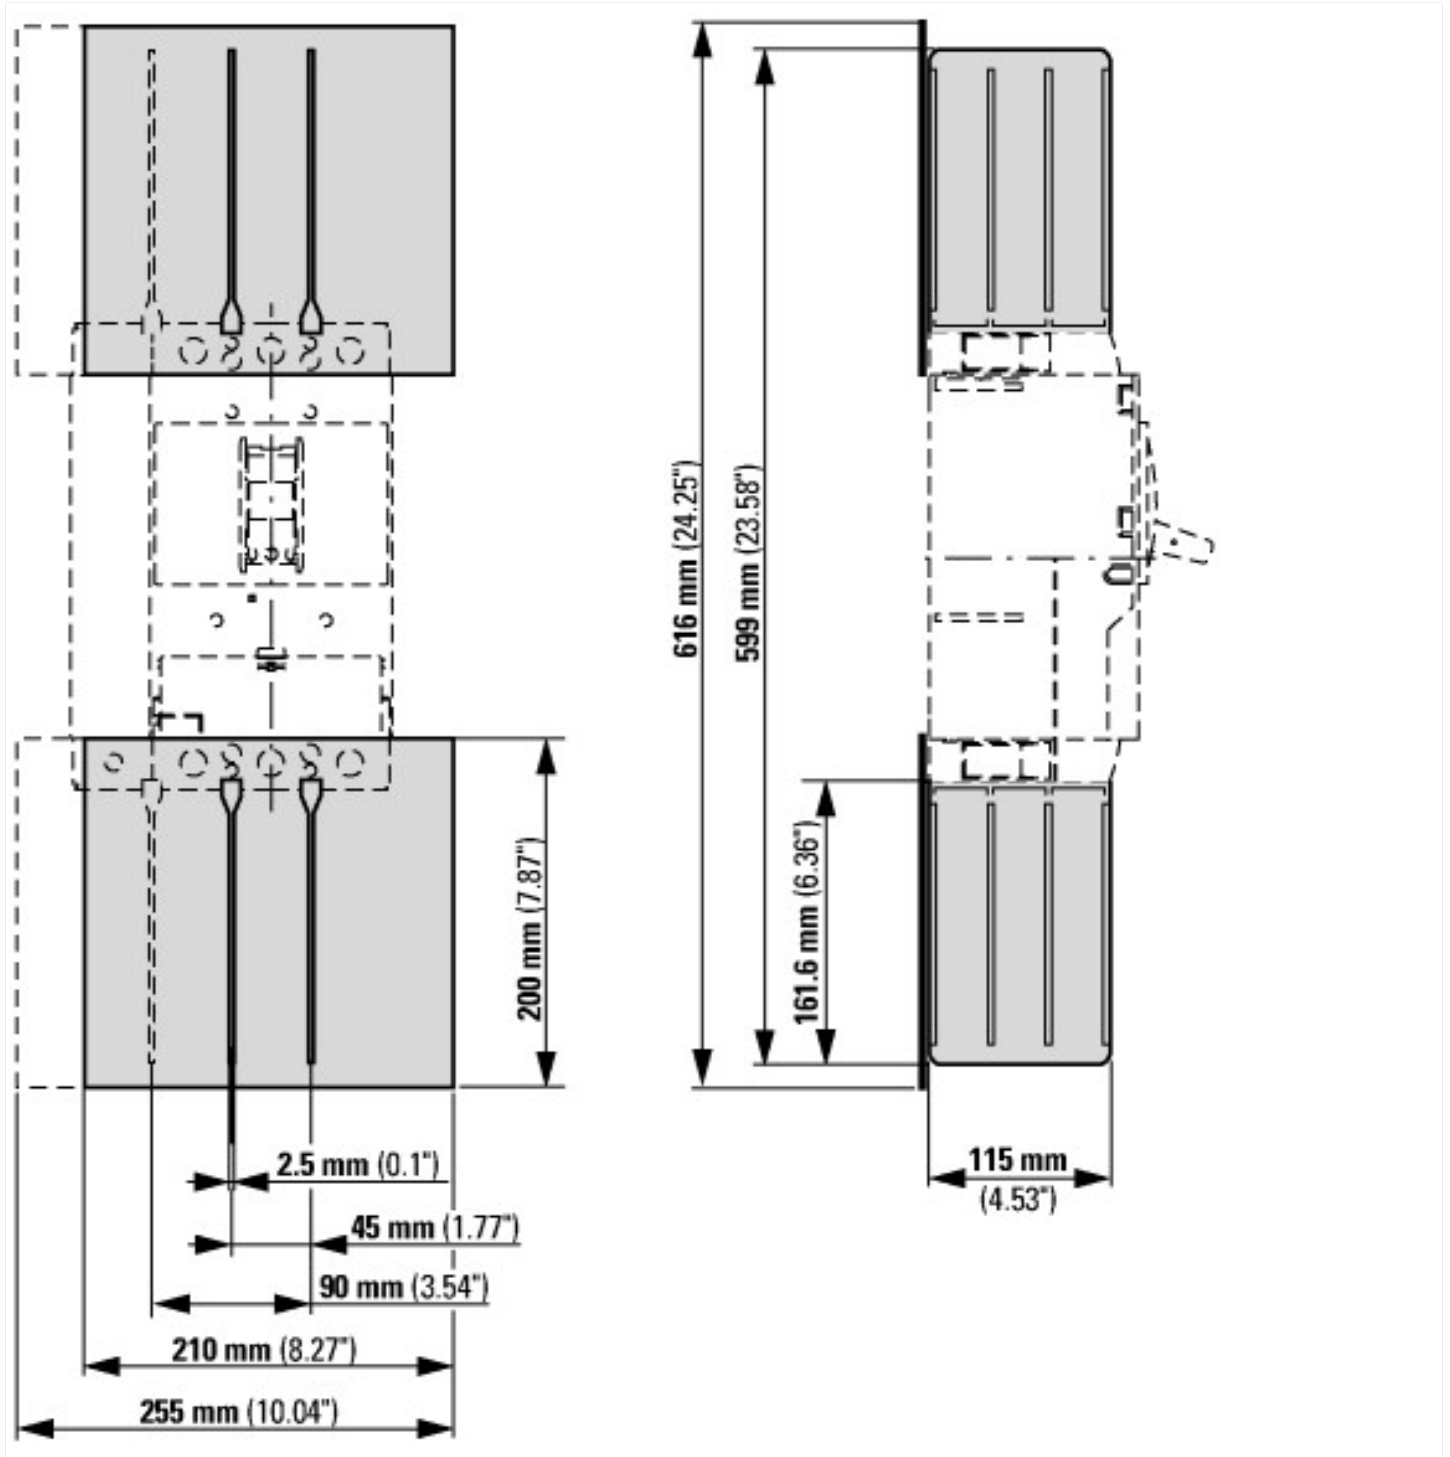

Additional product information (links)

IL01219032Z (AWA1230-2288) Connection extension for NZM3

IL01219032Z (AWA1230-2288) Connection extension for NZM3 https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219032Z2020_10.pdf