



Shunt release, for capacitor unit

Part no. NZM-XCM
Catalog No. 229413

Delivery program

Product range		Accessories
Accessories		Shunt release
Accessories		Shunt releases Capacitor unit
Standard/Approval		IEC
Construction size		NZM1/2/3/4
Description		Capacitor unit 230 V 50/60 Hz in conjunction with NZM...-XA208-250 AC/DC shunt release Enclosure: degree of protection IP20 not UL/CSA approved Enables the safe use of circuit-breakers as mesh network circuit-breakers in the range from 0 – 110 % Un with constant switch-off time of 40 ms. If the mains voltage is absent, the installed capacitor supplies power for actuating the shunt release for at least 12 hours. The configuration of the capacitor unit is undertaken independently of the circuit-breaker. Connect capacitor unit to the supply side! Engineering Guidelines: Connect a standard auxiliary contact as N/O in series with the shunt release! Standard auxiliary contact not included as standard.
For use with		NZM1(-4), N(S)1(-4) NZM2(-4), N(S)2(-4) NZM3(-4), N(S)3(-4) NZM4(-4), N(S)4(-4)
Contact sequence		

Technical data

Capacitor unit for shunt release

Rated operational voltage	U _e	V AC	230
Rated operational current	I _e	mA	< 10
Inrush current (peak value)	I _e	A	3
Terminal capacities		mm ²	
Solid or flexible conductor, with ferrule		mm ²	1 x (0,5 - 2,5)
		AWG	1 x (20 - 14) 2 x (20 - 16)
Overvoltage category/pollution degree			III/3

Rated surge voltage invariability

Main contacts		V	8000
Auxiliary contacts		V	8000

Design verification as per IEC/EN 61439


IEC/EN 61439 design verification		
10.2 Strength of materials and parts		
10.2.2 Corrosion resistance		Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures		Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat		Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects		Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation		Meets the product standard's requirements.

10.2.5 Lifting		Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact		Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions		Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES		Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances		Meets the product standard's requirements.
10.5 Protection against electric shock		Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components		Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Shunt release (for power circuit breaker) (EC001023)		
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Full load current trip (ecl@ss10.0.1-27-37-04-18 [AKF016013])		
Rated control supply voltage Us at AC 50HZ	V	230 - 230
Rated control supply voltage Us at AC 60HZ	V	230 - 230
Rated control supply voltage Us at DC	V	0 - 0
Voltage type for actuating		DC
Initial value of the undelayed short-circuit release - setting range	A	0
End value adjustment range undelayed short-circuit release	A	0
Type of electric connection		Screw connection
Number of contacts as normally open contact		0
Number of contacts as normally closed contact		0
Number of contacts as change-over contact		0
Suitable for power circuit breaker		Yes
Suitable for off-load switch		Yes
Suitable for motor safety switch		No
Suitable for overload relay		No

Dimensions

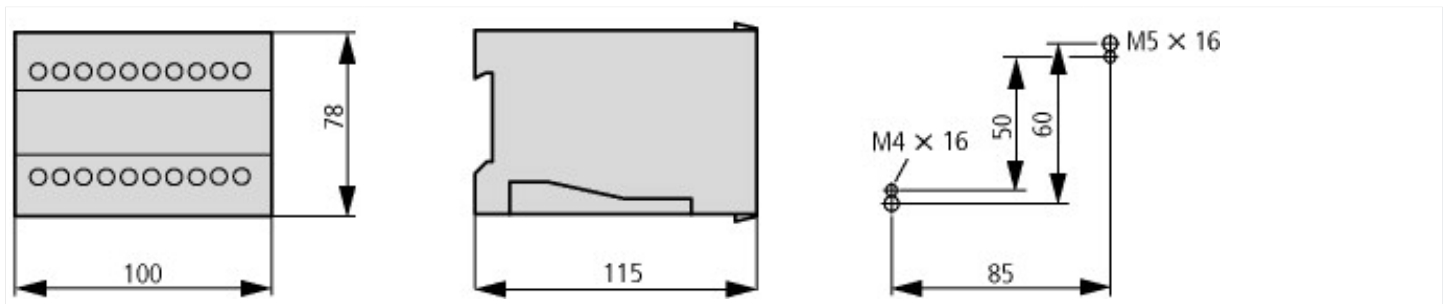

Additional product information (links)

IL01219002Z (AWA1230-1918) Capacitor unit	
IL01219002Z (AWA1230-1918) Capacitor unit	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219002Z2010_07.pdf
IL01219002Z (AWA1230-1918) Capacitor unit	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219002Z2021_01.pdf