



Circuit-breaker, 4p, 1000A

Part no. **NZMN4-4-VE1000**  
 Catalog No. **265978**

EL-Nummer (Norway) **0004358947**

Similar to illustration

### Delivery program

|                     |  |  |  |  |
|---------------------|--|--|--|--|
| Product range       |  |  |  | Circuit-breaker  |
| Protective function |  |  |  | Systems, cable, selectivity and generator protection   |
| Standard/Approval   |  |  |  | IEC  |
| Installation type   |  |  |  | Fixed  |
| Release system      |  |  |  | Electronic release   |
| Construction size   |  |  |  | NZM4   |
| Description         |  |  |  | R.m.s. value measurement and "thermal memory"<br>Adjustable time delay setting to overcome current peaks $t_r$ at $6 \times I_r$ also infinity (without overload releases)<br>Adjustable delay time $t_{sd}$<br>$i^2t$ constant function: switchable<br>Set value in neutral conductor is synchronous with set value $I_r$ of main pole. |
| Number of poles     |  |  |  | 4 pole   |
| Standard equipment  |  |  |  | Screw connection   |

### Switching capacity

|                 |          |    |    |
|-----------------|----------|----|----|
| 400/415 V 50 Hz | $I_{cu}$ | kA | 50 |
|-----------------|----------|----|----|

### Rated current = rated uninterrupted current

|   |                      |   |      |
|---|----------------------|---|------|
| Rated current = rated uninterrupted current | $I_n = I_u$          | A | 1000 |
| Neutral conductor                           | % of phase conductor | % | 100  |


### Setting range

|                        |                             |   |            |
|------------------------|-----------------------------|---|------------|
| Overload trip          |                             |   |            |
|                        | $I_r$                       | A | 500 - 1000 |
| Main pole              |                             |   |            |
|                        | $I_r$                       | A | 500 - 1000 |
| Short-circuit releases |                             |   |            |
|                        |                             |   |            |
| Non-delayed            | $I_i = I_n \times \dots$    |   | 2 - 12     |
|                        |                             |   |            |
| Delayed                | $I_{sd} = I_r \times \dots$ |   | 2 - 10     |
|                        |                             |   |            |

### Technical data

#### General

|                                   |  |    |  |
|-----------------------------------|--|----|--|
| Standards                         |  |    | IEC/EN 60947   |
| Protection against direct contact |  |    | Finger and back of hand proof to VDE 0106 Part 100                             |
| Climatic proofing                 |  |    | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature               |  |    |  |
| Ambient temperature, storage      |  | °C | - 40 - + 70  |
| Operation                         |  | °C | -25 - +70  |

|   |  |      |  |
|---|--|------|--|
| Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27 |  | g    | 15 (half-sinusoidal shock 11 ms)   |
| Safe isolation to EN 61140  |  |      |  |
| Between auxiliary contacts and main contacts  |  | V AC | 500  |
| between the auxiliary contacts  |  | V AC | 300  |
| Weight  |  | kg   | 27   |
| Mounting position   |  |      | Vertical and 90° in all directions<br><br>With XFI earth-fault release:<br>- NZM1, N1, NZM2, N2: vertical and 90° in all directions<br>with plug-in unit<br>- NZM1, N1, NZM2, N2: vertical, 90° right/left<br>with withdrawable unit:<br>- NZM3, N3: vertical, 90° right/left<br>- NZM4, N4: vertical<br>with remote operator:<br>- NZM2, N(S)2, NZM3, N(S)3,<br>NZM4, N(S)4: vertical and 90° in all directions |
| Direction of incoming supply  |  |      | as required  |
| Degree of protection  |  |      |  |
| Device  |  |      | In the operating controls area: IP20 (basic degree of protection)  |
| Enclosures  |  |      | With insulating surround: IP40<br>With door coupling rotary handle: IP66   |
| Terminations  |  |      | Tunnel terminal: IP10<br>Phase isolator and strip terminal: IP00   |
| Other technical data (sheet catalogue)  |  |      | Temperature dependency, Derating   |

### Circuit-breakers

|   |             |      |            |
|---|-------------|------|------------|
| Rated current = rated uninterrupted current | $I_n = I_u$ | A    | 1000       |
| Rated surge voltage invariability           | $U_{imp}$   |      |            |
| Main contacts                               |             | V    | 8000       |
| Auxiliary contacts                          |             | V    | 6000       |
| Rated operational voltage                   | $U_e$       | V AC | 690        |
| Overtoltage category/pollution degree       |             |      | III/3      |
| Rated insulation voltage                    | $U_i$       | V    | 1000       |
| Use in unearthed supply systems             |             | V    | $\leq 525$ |

### Switching capacity

|   |          |    |   |
|---|----------|----|---|
| Rated short-circuit making capacity             | $I_{cm}$ |    |   |
| 240 V   | $I_{cm}$ | kA | 105   |
| 400/415 V                                       | $I_{cm}$ | kA | 105   |
| 440 V 50/60 Hz                                  | $I_{cm}$ | kA | 74  |
| 525 V 50/60 Hz                                  | $I_{cm}$ | kA | 53  |
| 690 V 50/60 H                                   | $I_c$    | kA | 40  |
| Rated short-circuit breaking capacity $I_{cn}$  | $I_{cn}$ |    |   |
| $I_{cu}$ to IEC/EN 60947 test cycle O-t-CO      | $I_{cu}$ | kA |   |
| 240 V 50/60 Hz                                  | $I_{cu}$ | kA | 50  |
| 400/415 V 50/60 Hz                              | $I_{cu}$ | kA | 50  |
| 440 V 50/60 Hz                                  | $I_{cu}$ | kA | 35  |
| 525 V 50/60 Hz                                  | $I_{cu}$ | kA | 25  |
| 690 V 50/60 Hz                                  | $I_{cu}$ | kA | 20  |
| $I_{cs}$ to IEC/EN 60947 test cycle O-t-CO-t-CO | $I_{cs}$ | kA |   |
| 240 V 50/60 Hz                                  | $I_{cs}$ | kA | 37  |
| 400/415 V 50/60 Hz                              | $I_{cs}$ | kA | 37  |
| 440 V 50/60 Hz                                  | $I_{cs}$ | kA | 26  |
| 525 V 50/60 Hz                                  | $I_{cs}$ | kA | 19  |
| 690 V 50/60 Hz                                  | $I_{cs}$ | kA | 15  |
|   |          |    | Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker. |
| Rated short-time withstand current              |          |    |   |
| $t = 0.3$ s                                     | $I_{cw}$ | kA | 12  |

|   |                 |       |                            |
|---|-----------------|-------|----------------------------|
| t = 1 s   | I <sub>cw</sub> | kA    | 12                         |
| Utilization category to IEC/EN 60947-2                                      |                 |       | B                          |
| Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release) | Operations      |       | 10000                      |
| Lifespan, electrical  |                 |       |                            |
| AC-1  |                 |       |                            |
| 400 V 50/60 Hz  | Operations      |       | 3000                       |
| 415 V 50/60 Hz  | Operations      |       | 3000                       |
| 690 V 50/60 Hz  | Operations      |       | 2000                       |
| AC--3   |                 |       |                            |
| 400 V 50/60 Hz  | Operations      |       | 2000                       |
| 415 V 50/60 Hz  | Operations      |       | 2000                       |
| 690 V 50/60 Hz  | Operations      |       | 1000                       |
| Max. operating frequency  |                 | Ops/h | 60                         |
| Total break time at short-circuit   |                 | ms    | < 25 ≤ 415 V; < 35 > 415 V |

### Terminal capacity

|   |      |                 |   |
|---|------|-----------------|---|
| Standard equipment  |      |                 | Screw connection  |
| Optional accessories                                      |      |                 | Tunnel terminal<br>connection on rear<br>Strip terminal |
| Round copper conductor                                    |      |                 |   |
| Tunnel terminal   |      |                 |   |
| Stranded  |      |                 |   |
| 4-hole  |      | mm <sup>2</sup> | 4 x (50 - 240)  |
| Bolt terminal and rear-side connection                    |      |                 |   |
| Direct on the switch                                      |      |                 |   |
| Stranded  |      | mm <sup>2</sup> | 1 x (120 - 185)<br>4 x (50 - 185)                       |
| Module plate  |      |                 |   |
| Single hole   | min. | mm <sup>2</sup> | 1 x (120 - 300)   |
| Single hole   | max. | mm <sup>2</sup> | 2 x (95 - 300)  |
| Module plate  |      |                 |   |
| Double hole   | min. | mm <sup>2</sup> | 2 x (95 - 185)  |
| Double hole   | max. | mm <sup>2</sup> | 4 x (35 - 185)  |
| Connection width extension                                |      | mm <sup>2</sup> |   |
| Connection width extension                                |      | mm <sup>2</sup> | 4 x 300<br>6 x (95 - 240)                               |
| Al circular conductor                                     |      |                 |   |
| Tunnel terminal   |      |                 |   |
| Stranded  |      |                 |   |
| 4-hole  |      | mm <sup>2</sup> | 4 x (50 - 240)  |
| Bolt terminal and rear-side connection                    |      |                 |   |
| Module plate  |      |                 |   |
| Single hole   | min. | mm <sup>2</sup> | 1 x (185 - 240)   |
| Single hole   | max. | mm <sup>2</sup> | 2 x (70 - 185)  |
| Module plate  |      |                 |   |
| Double hole   |      | mm <sup>2</sup> | 4 x 50  |
| Connection width extension                                |      | mm <sup>2</sup> |   |
| Connection width extension                                |      | mm <sup>2</sup> | 2 x 240<br>6 x (70 - 240)                               |
| Cu strip (number of segments x width x segment thickness) |      |                 |   |
| Flat conductor terminal                                   |      |                 |   |
|   | min. | mm              | 6 x 16 x 0.8  |
|   | max. | mm              | (2 x) 10 x 32 x 1.0                                     |
| Module plate  |      |                 |   |
| Single hole   |      | mm              | (2 x) 10 x 50 x 1.0                                     |

|  |      |                 |                                      |
|--|------|-----------------|--------------------------------------|
| Bolt terminal and rear-side connection |      |                 |                                      |
| Flat copper strip, with holes          | min. | mm              | 5 x 25 x 1.0                         |
| Flat copper strip, with holes          | max. | mm              | (2 x) 10 x 50 x 1.0                  |
| Connection width extension             |      | mm              | (2 x) 10 x 80 x 1.0                  |
| Copper busbar (width x thickness)      |      |                 |                                      |
| Bolt terminal and rear-side connection |      |                 |                                      |
| Screw connection                       |      |                 | M10                                  |
| Direct on the switch                   |      |                 |                                      |
|  | min. | mm              | 25 x 5                               |
|  | max. | mm              | 2 x (50 x 10)                        |
| Module plate                           |      |                 |                                      |
| Single hole                            | min. | mm              | 25 x 5                               |
| Single hole                            | max. | mm              | 2 x (50 x 10)                        |
| Module plate                           |      |                 |                                      |
| Double hole                            |      | mm              | 2 x (50 x 10)                        |
| Connection width extension             |      |                 |                                      |
| Connection width extension             | min. | mm              | 60 x 10                              |
| Connection width extension             | max. | mm              | 2 x (80 x 10)                        |
| Control cables                         |      |                 |                                      |
|  |      | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 1.5) |


## Design verification as per IEC/EN 61439

|  |                  |    |  |
|--|------------------|----|--|
| Technical data for design verification   |                  |    |  |
| Rated operational current for specified heat dissipation   | I <sub>n</sub>   | A  | 1000   |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub> | W  | 165  |
| Operating ambient temperature min.   |                  | °C | -25  |
| Operating ambient temperature max.   |                  | °C | 70   |
| IEC/EN 61439 design verification   |                  |    |  |
| 10.2 Strength of materials and parts   |                  |    |  |
| 10.2.2 Corrosion resistance  |                  |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                  |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                  |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                  |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                  |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |                  |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |                  |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |                  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |                  |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |                  |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |                  |    |  |
| 10.9.2 Power-frequency electric strength   |                  |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |                  |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |                  |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |                  |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |                  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |                  |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

| Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation protection (EC000228)   |    |  |
|---|----|--|
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (ecl@ss10.0.1-27-37-04-09 [AJZ716013]) |    |  |
| Rated permanent current I <sub>u</sub>  | A  | 1000                                     |
| Rated voltage   | V  | 690 - 690                                |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, 50 Hz   | kA | 50                                       |
| Overload release current setting  | A  | 500 - 1000                               |
| Adjustment range short-term delayed short-circuit release   | A  | 1000 - 10000                             |
| Adjustment range undelayed short-circuit release  | A  | 2000 - 12000                             |
| Integrated earth fault protection   |    | No                                       |
| Type of electrical connection of main circuit   |    | Screw connection                         |
| Device construction   |    | Built-in device fixed built-in technique |
| Suitable for DIN rail (top hat rail) mounting   |    | No                                       |
| DIN rail (top hat rail) mounting optional   |    | No                                       |
| Number of auxiliary contacts as normally closed contact   |    | 0  |
| Number of auxiliary contacts as normally open contact   |    | 0  |
| Number of auxiliary contacts as change-over contact   |    | 0  |
| With switched-off indicator   |    | No                                       |
| With under voltage release  |    | No                                       |
| Number of poles   |    | 4  |
| Position of connection for main current circuit   |    | Front side                               |
| Type of control element   |    | Rocker lever                             |
| Complete device with protection unit  |    | Yes                                      |
| Motor drive integrated  |    | No                                       |
| Motor drive optional  |    | Yes                                      |
| Degree of protection (IP)   |    | IP20                                     |


# Characteristics

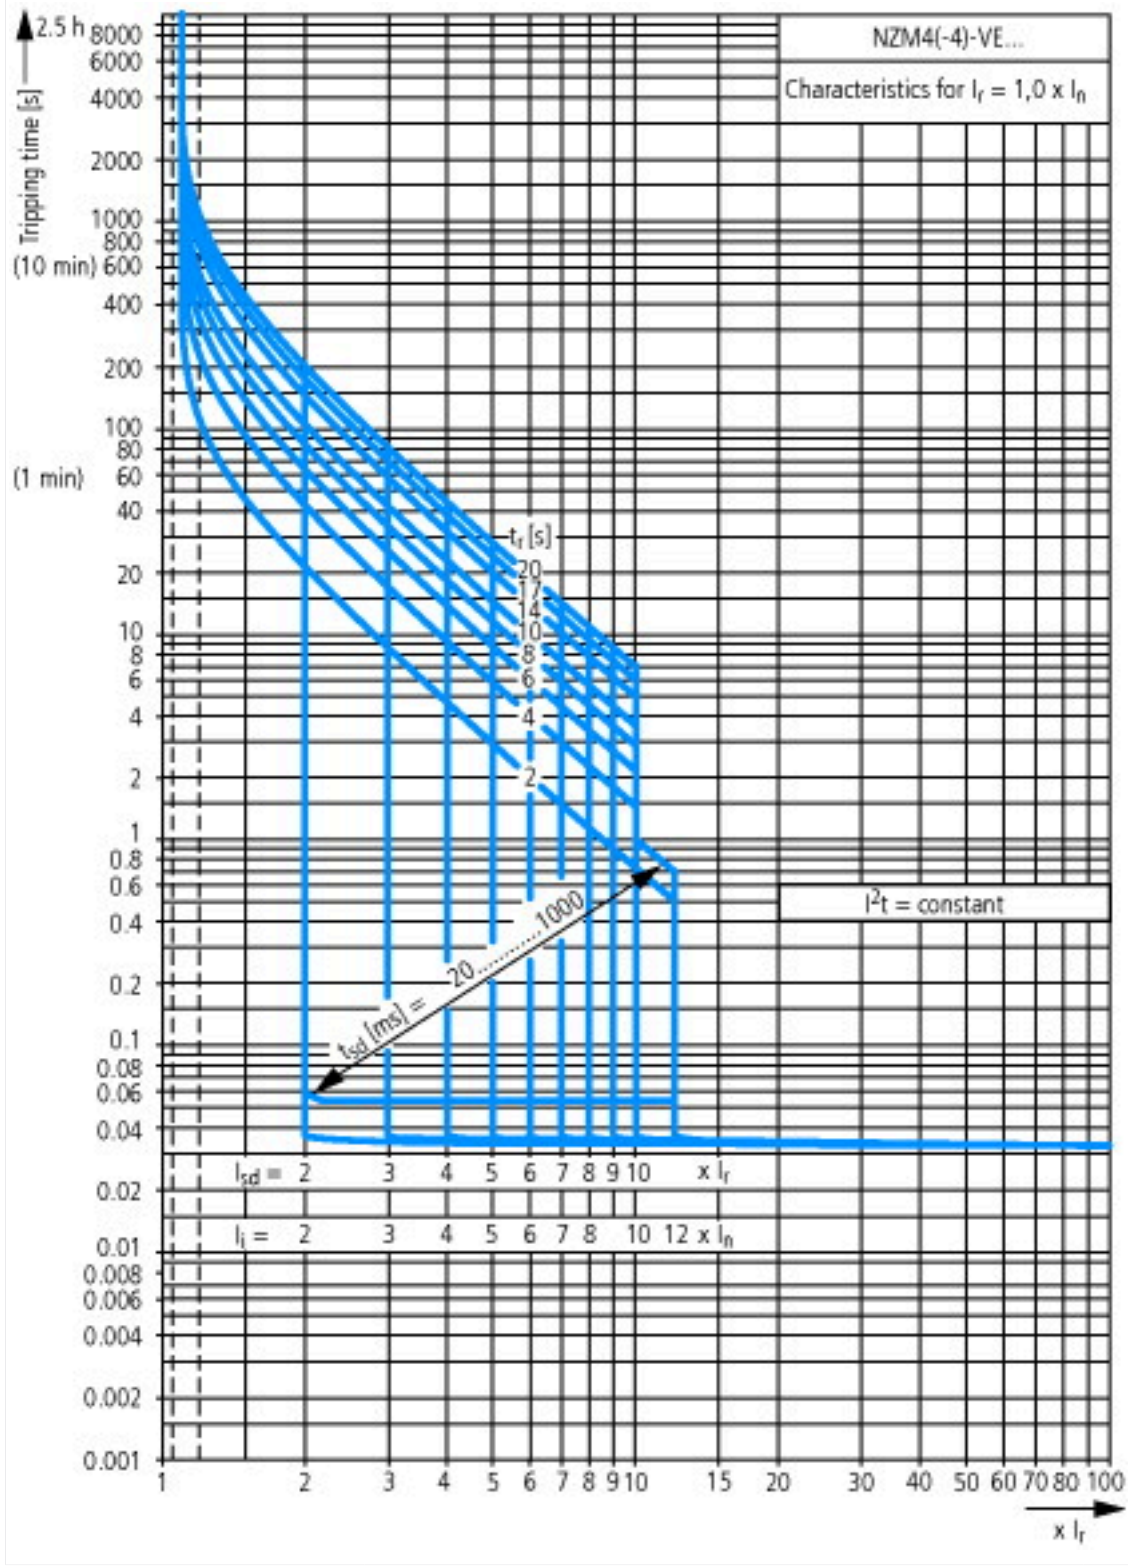





## Dimensions

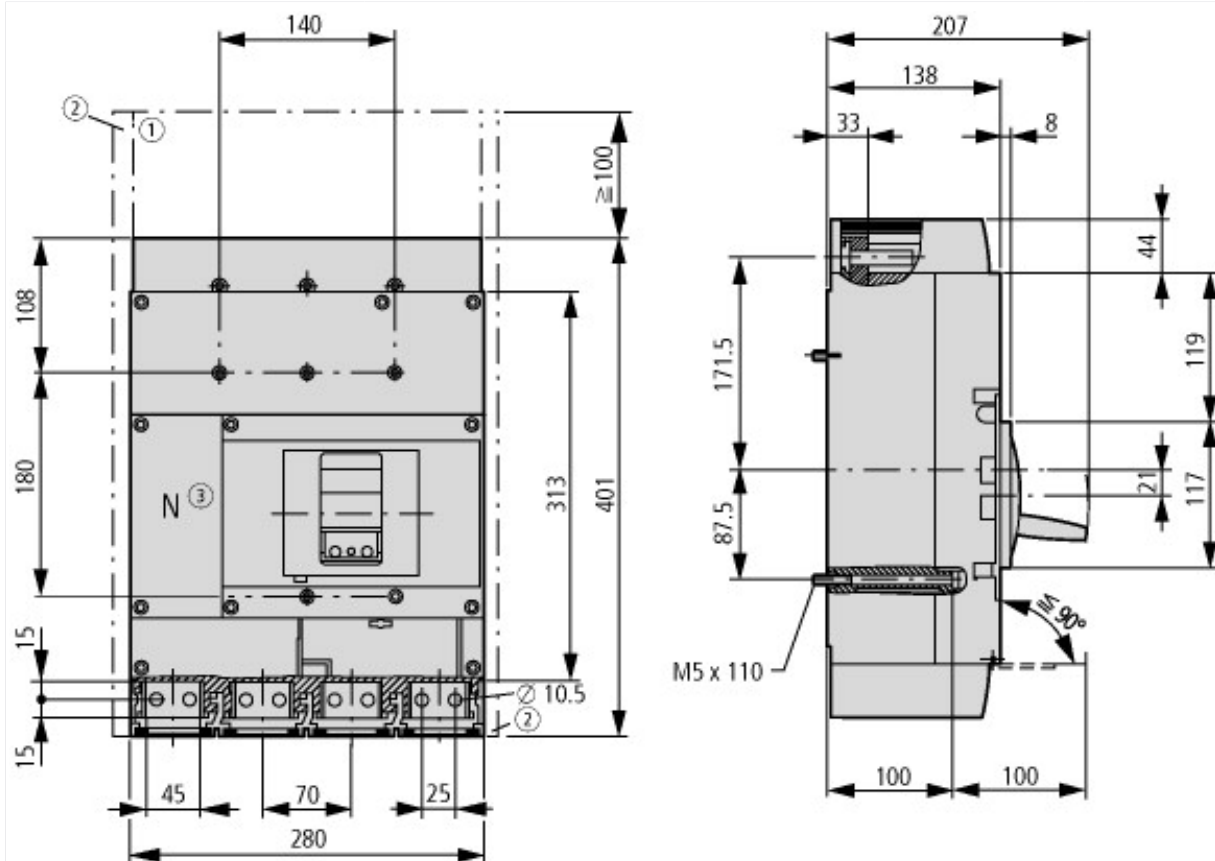

① Blow out area, minimum clearance to adjacent parts

Ui ≤ 690 V: 100 mm

Ui ≤ 1500 V: 200 mm

② Minimum clearance to adjacent parts

Ui ≤ 1000 V: 15 mm

Ui ≤ 1500 V: 70 mm

## Additional product information (links)

### IL01210010Z (AWA1230-2022) Circuit-Breaker, basic unit

IL01210010Z (AWA1230-2022) Circuit-Breaker, basic unit

[https://es-assets.eaton.com/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL01210010Z2018\\_11.pdf](https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL01210010Z2018_11.pdf)

Temperature dependency, Derating

<http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172>

CurveSelect characteristics program

<http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/CharacteristicsProgram/index.htm>

Eaton configurator

<http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/ConfiguratorCircuitBreaker/index.htm>

additional technical information for NZM power switch

[https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm\\_technic\\_de\\_en.pdf](https://es-assets.eaton.com/DOCUMENTATION/PDF/nzm_technic_de_en.pdf)