



## Control circuit terminal, screw connection, size 3/4

**Part no.** NZM3/4-XSTS  
**Catalog No.** 266797

**EL-Nummer (Norway)** 0004358960

Similar to illustration

## Delivery program

Accessories			Control circuit terminal
For use with			NZM3(-4), PN3, N(S)3(-4) NZM4(-4), N(S)4(-4)
<b>Terminal capacities</b>			
Type of conductor			
Cu/Al cable			Screw connection
Terminal capacities			
flexible		mm <sup>2</sup>	1 x 0.75 ... 2.5 2 x 0.75 ... 1.5
AWG/kcmil		mm <sup>2</sup>	1 x 18 - 14 2 x 18 - 16
<b>Notes</b>			
Type contains parts for two terminal locations located at top or bottom for 3 or 4 pole circuit-breakers.			
Included as standard with tunnel terminal			
Degree of protection IP1X			
Height or thickness of the control circuit terminals			
NZM-XSTS = 2 mm			

## Design verification as per IEC/EN 61439

IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.

## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Wiring set for power circuit breaker (EC002050)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Wiring set for circuit breaker (ecl@ss10.0.1-27-37-04-24 [ACN957011])

Suitable for number of poles

1

Model

Other

## Approvals

Product Standards

UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking

UL File No.

E140305

UL Category Control No.

DIHS

CSA File No.

022086

CSA Class No.

1437-01


North America Certification

UL listed, CSA certified

Suitable for

Refer to main component information

## Dimensions

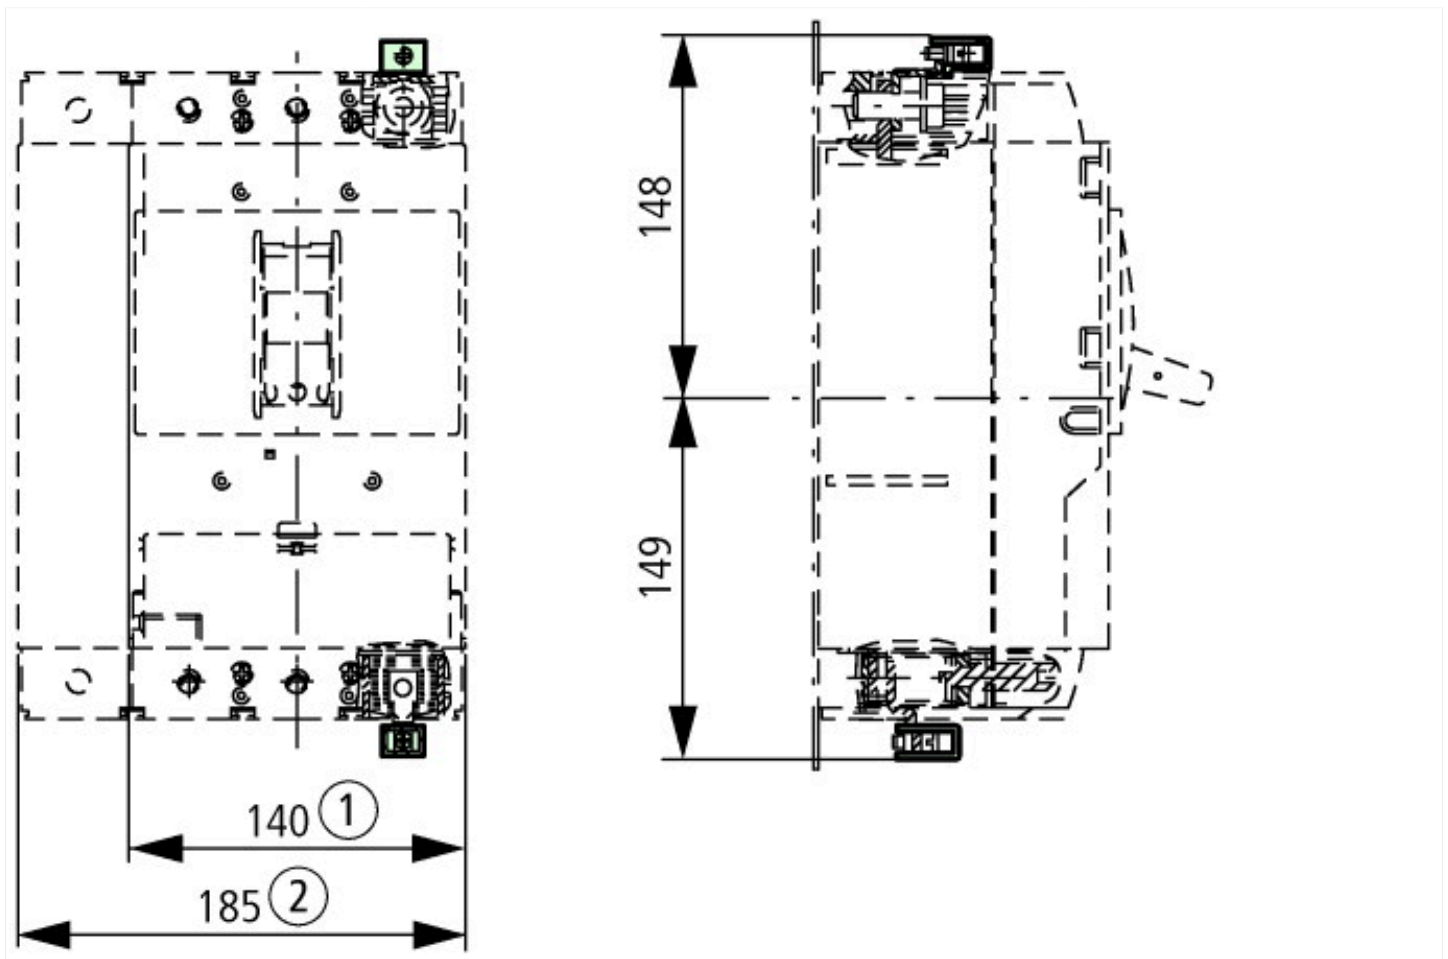

- ① 3 pole
- ② 4 pole