


with or without terminals

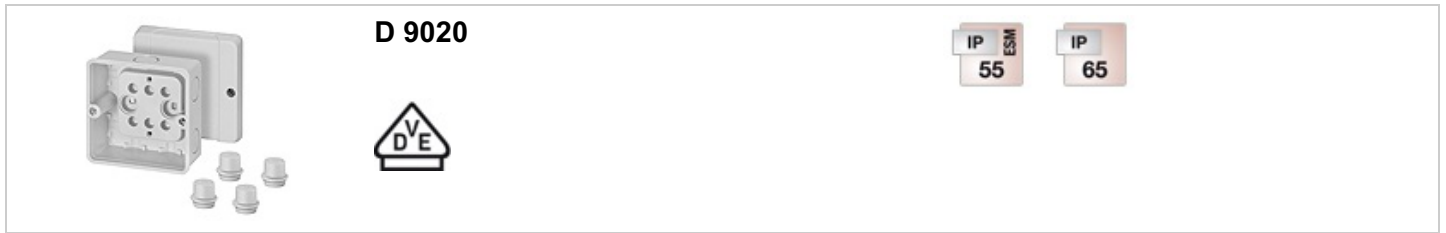


- without terminals
- included cable entry: 4 ESM 20, sealing range Ø 6-13 mm
- for normal environment and protected outdoor
- Colour: grey, RAL 7035

material	PS (Polystyrene)
Degree of protection:	IP 55 (ESM)
Degree of protection:	(see cable entry systems LES) IP 65
mounting width	59 mm
mounting height	66 mm
max. installation depth	37 mm
width	88 mm
height:	88 mm
depth	53 mm
Weight	0,112 kg
in accordance with	IEC 60670-22

Drawings


Dimension drawing

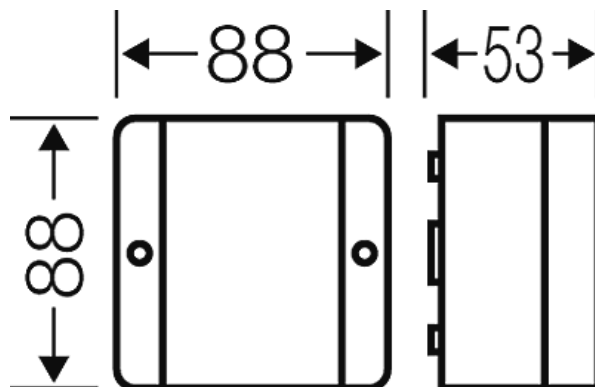


with or without terminals



Detail mass

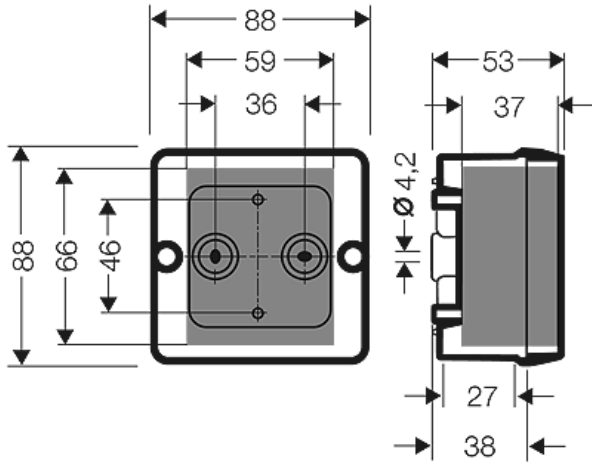


Box walls

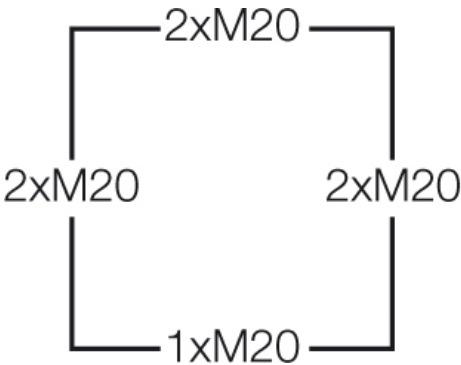

**Operating and ambient conditions**

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Resistant to occasional cleaning procedures (direct jet)	Resistant to occasional cleaning procedures (direct jet) with high-pressure cleaner without additives, water pressure: max. 100 bar, water temperature: max. 80° C, distance => 0,15 m, in accordance with the requirements IP 69, enclosure and cable glands at least IP 65
Ambient temperature	Maximum value + 40 °C Minimum value - 25 °C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Burning behaviour	Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: V-2 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK07 (2 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables

with or without terminals

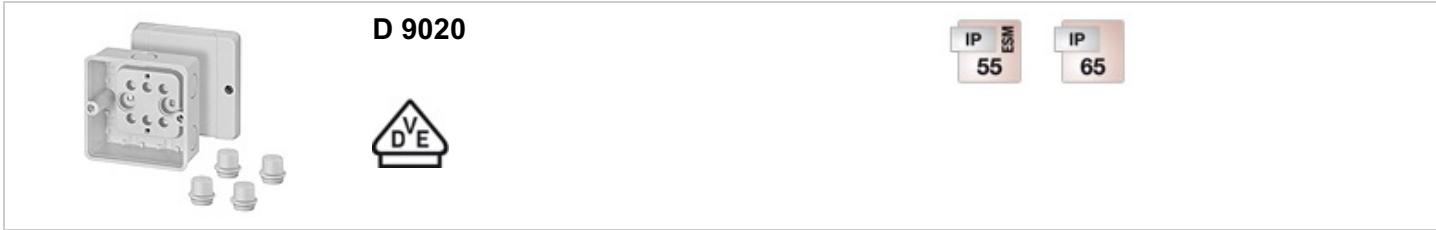

and insulated wires - corrosiveness of fumes - as per IEC 60 754-2

Note:

For material properties see technical data.