


With or without terminals

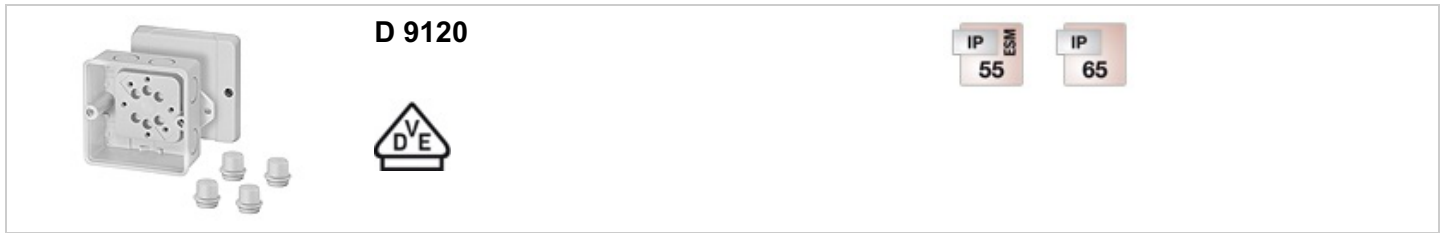


- Replaced by DK 0200 G from 31.12.2017
- without terminals
- with external fixing
- included cable entry: 4 ESM 20, sealing range Ø 6-13 mm
- for normal environment and protected outdoor
- colour: grey, RAL 7035


material	PS (Polystyrene)
degree of protection	IP 55 (ESM)
degree of protection	(see cable entry systems LES) IP 65
mounting width	59 mm
mounting height	66 mm
max. installation depth	37 mm
width	88 mm
height	88 mm
depth	53 mm
weight	0,111 kg
in accordance with	IEC 60670-22

Drawings

Dimension drawing

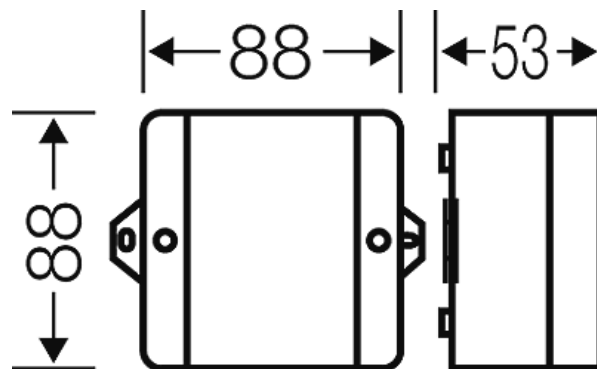

With or without terminals

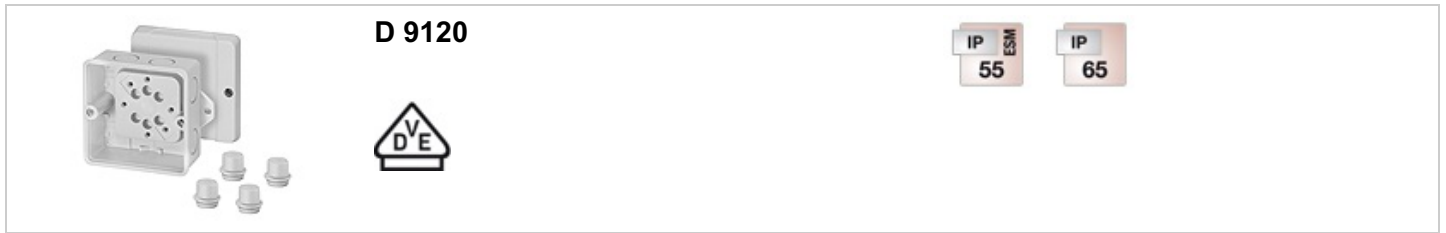


D 9120

IP 55 ESM


IP 65



Detail mass

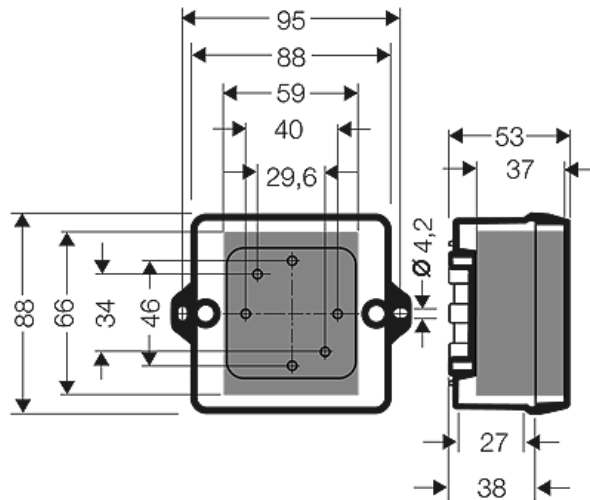


Box walls

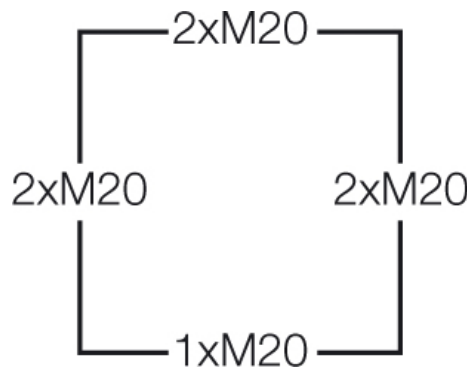

Operating and ambient conditions

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Resistant to occasional cleaning procedures (direct jet)	Resistant to occasional cleaning procedures (direct jet) with high-pressure cleaner without additives, water pressure: max. 100 bar, water temperature: max. 80° C, distance => 0,15 m, in accordance with the requirements IP 69, enclosure and cable glands at least IP 65
Ambient temperature	Maximum value + 40 °C Minimum value - 25 °C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Burning behaviour	Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: V-2 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK07 (2 Joule)
Toxic behaviour	halogen-free silicone-free

With or without terminals

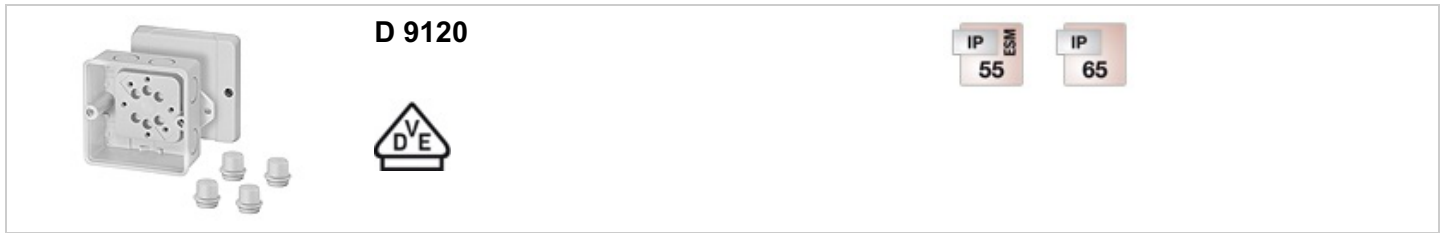

"halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60754-2

Note:

For material properties see technical data.