


KDKS 1/35 DB**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

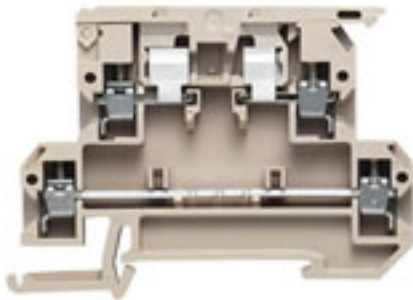Product image

In some applications it is useful to protect the feed through connection with a separate fuse. Fuse terminal blocks are made up of one terminal block bottom section with a fuse insertion carrier. The fuses vary from pivoting fuse levers and pluggable fuse holders to screwable closures and flat plug-in fuses.

General ordering data

| | |
|------------|--|
| Version | SAK Series, Fuse terminal, Rated cross-section: 4 mm ² , Screw connection, Wemid, dark beige, Direct mounting |
| Order No. | 9532440000 |
| Type | KDKS 1/35 DB |
| GTIN (EAN) | 4032248039203 |
| Qty. | 50 pc(s). |

Creation date April 24, 2023 10:18:46 AM CEST

Catalogue status 14.04.2023 / We reserve the right to make technical changes.

KDKS 1/35 DB

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|--------------------------|------------|----------------|------------|
| Depth | 55.6 mm | Depth (inches) | 2.189 inch |
| Depth including DIN rail | 54.6 mm | Height | 73.5 mm |
| Height (inches) | 2.894 inch | Width | 8 mm |
| Width (inches) | 0.315 inch | Net weight | 20.32 g |

Temperatures

| | | | |
|----------------------------------|----------------|----------------------------------|--------|
| Storage temperature | -25 °C...55 °C | Continuous operating temp., min. | -50 °C |
| Continuous operating temp., max. | 120 °C | | |

Material data

| | | | |
|----------|------------|---------------------------|-------|
| Material | Wemid | Insulating material | Wemid |
| Colour | dark beige | UL 94 flammability rating | V-0 |

System specifications

| | | | |
|-----------------------------------|--|-------------------------------------|-----|
| Version | Screw connection, Fuse isolator, One end without connector | End cover plate required | Yes |
| Number of levels | 2 | Number of clamping points per level | 2 |
| Levels cross-connected internally | No | PE connection | No |
| Rail | TS 35 | | |

Additional technical data

| | | | |
|-----------------------------|---------|---------------------|-----------------|
| Explosion-tested version | No | Installation advice | Direct mounting |
| Number of similar terminals | 1 | Open sides | right |
| Type of mounting | Snap-on | | |

CSA rating data

| | | | |
|-------------------------------|-----------|-------------------------------|--------|
| Certificate No. (CSA) | 12400-281 | Current size D (CSA) | 10 A |
| Voltage size D (CSA) | 300 V | Wire cross section max. (CSA) | 12 AWG |
| Wire cross section min. (CSA) | 26 AWG | | |

Conductors for clamping (additional connection)

| | |
|---|-------------------|
| Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max. | 4 mm ² |
|---|-------------------|

KDKS 1/35 DB

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

| | | | |
|---|----------------------|---|---------------------|
| Blade size | 0.6 x 3.5 mm | Clamping range, max. | 4 mm ² |
| Clamping range, min. | 0.22 mm ² | Clamping screw | M 3 |
| Connection cross-section, finely stranded, max. | 4 mm ² | Connection cross-section, finely stranded, min. | 0.5 mm ² |
| Connection cross-section, stranded, max. | 4 mm ² | Connection cross-section, stranded, min. | 1.5 mm ² |
| Connection direction | on side | Gauge to IEC 60947-1 | A3 |
| Stripping length | 8 mm | Tightening torque, max. | 0.8 Nm |
| Tightening torque, min. | 0.5 Nm | Twin wire-end ferrules, max. | 1.5 mm ² |
| Twin wire-end ferrules, min. | 0.5 mm ² | Type of connection | Screw connection |
| Wire connection cross section, finely stranded, max. | 4 mm ² | Wire connection cross section, finely stranded, min. | 0.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 4 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm ² |
| Wire connection cross-section, solid core, max. | 4 mm ² | Wire connection cross-section, solid core, min. | 0.5 mm ² |

Display element

| | | | |
|-------------------------------------|-------|-------------------------------|----|
| Operating voltage for display, max. | 500 V | Type of voltage for indicator | AC |
|-------------------------------------|-------|-------------------------------|----|

Fuse terminals

| | | | |
|--|-----------------------|--|-----------------------|
| Cartridge fuse | G-Si. 5 x 20 | Display | Without LED |
| Fuse holder (cartridge holder) | Pivoting | Operating voltage, max. | 500 V |
| Power loss for overload and short-circuit protection for a composite arrangement | 1.6 W at 6.3 A @ 23°C | Power loss for overload and short-circuit protection for an individual arrangement | 1.6 W at 6.3 A @ 50°C |
| Power loss for short-circuit protection only for a composite arrangement | 1.6 W at 6.3 A @ 41°C | Type of voltage for indicator | AC |

General

| | | | |
|---------------------|-----------------|------|-------|
| Installation advice | Direct mounting | Rail | TS 35 |
| Standards | IEC 60947-7-3 | | |

Rating data

| | | | |
|--|-------------------|---------------------------------|---------------|
| Rated cross-section | 4 mm ² | Rated voltage | 440 V |
| Rated voltage to adjoining terminal | 500 V | Rated current | 6.3 A |
| Current at maximum wires | 6.3 A | Standards | IEC 60947-7-3 |
| Volume resistance according to IEC 60947-7-x | 1 mΩ | Rated impulse withstand voltage | 6 kV |
| Power loss in accordance with IEC 60947-7-x | 1.02 W | Pollution severity | 3 |

UL rating data

| | | | |
|---|--------|---|--------|
| Certificate No. (UR) | E60693 | Conductor size Factory wiring max. (UR) | 12 AWG |
| Conductor size Factory wiring min. (UR) | 26 AWG | Conductor size Field wiring max. (UR) | 12 AWG |
| Conductor size Field wiring min. (UR) | 22 AWG | Current size C (UR) | 10 A |
| Voltage size C (UR) | 300 V | | |

KDKS 1/35 DB

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000899 | ETIM 7.0 | EC000899 |
| ETIM 8.0 | EC000899 | ECLASS 9.0 | 27-14-11-16 |
| ECLASS 9.1 | 27-14-11-16 | ECLASS 10.0 | 27-14-11-16 |
| ECLASS 11.0 | 27-14-11-16 | ECLASS 12.0 | 27-14-11-16 |

Important note

Product information The voltage depends on the selected fuse element or the selected indicator light

Approvals

Approvals



| | |
|-----------------------|------------|
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate No. (UR) | E60693 |

Downloads

| | |
|---|--|
| Approval/Certificate/Document of Conformity | EAC certificate Declaration of Conformity CE Declaration of Conformity all terminals UKCA declaration of conformity |
| Engineering Data | CAD data – STEP |
| Engineering Data | WSCAD, Zuken E3.S |
| User Documentation | StorageConditionsTerminalBlocks |
| Catalogues | Catalogues in PDF-format |
| Brochures | |

Data sheet

KDKS 1/35 DB

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings



KDKS 1/35 DB

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

SAK-Series



End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

General ordering data

| Type | AP KDKS1 DB | Version |
|------------|----------------------------|--|
| Order No. | 9532470000 | SAK Series, End plate, 1.5 mm, dark beige, Direct mounting |
| GTIN (EAN) | 4032248039227 | |
| Qty. | 20 pc(s). | |

5x20



For protection against overcurrent, we offer cartridge fuse with dimensions 5x20 mm in sizes from 100 mA to 6.3 A.

General ordering data

| Type | G 20/0.20A/F | Version |
|------------|----------------------------|-------------------------|
| Order No. | 0430400000 | Active components, Fuse |
| GTIN (EAN) | 4008190152383 | |
| Qty. | 10 pc(s). | |
| Type | G 20/2.00A/F | Version |
| Order No. | 0430900000 | Active components, Fuse |
| GTIN (EAN) | 4008190123567 | |
| Qty. | 10 pc(s). | |
| Type | G 20/2.50A/F | Version |
| Order No. | 0431000000 | Active components, Fuse |
| GTIN (EAN) | 4008190085513 | |
| Qty. | 10 pc(s). | |
| Type | G 20/1.60A/F | Version |
| Order No. | 0430800000 | Active components, Fuse |
| GTIN (EAN) | 4008190031503 | |
| Qty. | 10 pc(s). | |
| Type | G 20/0.25A/F | Version |
| Order No. | 0430500000 | Active components, Fuse |
| GTIN (EAN) | 4008190153991 | |
| Qty. | 10 pc(s). | |

Creation date April 24, 2023 10:18:46 AM CEST

KDKS 1/35 DB


Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

| | | |
|------------|----------------------------|-------------------------|
| Type | G 20/0.10A/F | Version |
| Order No. | 0430300000 | Active components, Fuse |
| GTIN (EAN) | 4008190077174 | |
| Qty. | 10 pc(s). | |
| Type | G 20/0.63A/F | Version |
| Order No. | 0439000000 | Active components, Fuse |
| GTIN (EAN) | 4008190131210 | |
| Qty. | 10 pc(s). | |
| Type | G 20/4.00A/F | Version |
| Order No. | 0431200000 | Active components, Fuse |
| GTIN (EAN) | 4008190022983 | |
| Qty. | 10 pc(s). | |
| Type | G 20/1.00A/F | Version |
| Order No. | 0430700000 | Active components, Fuse |
| GTIN (EAN) | 4008190093877 | |
| Qty. | 10 pc(s). | |
| Type | G 20/3.15A/F | Version |
| Order No. | 0431100000 | Active components, Fuse |
| GTIN (EAN) | 4008190012977 | |
| Qty. | 10 pc(s). | |
| Type | G 20/5.00A/F | Version |
| Order No. | 0431300000 | Active components, Fuse |
| GTIN (EAN) | 4008190185381 | |
| Qty. | 10 pc(s). | |
| Type | G 20/6.30A/F | Version |
| Order No. | 0431400000 | Active components, Fuse |
| GTIN (EAN) | 4008190086053 | |
| Qty. | 10 pc(s). | |
| Type | G 20/0.50A/F | Version |
| Order No. | 0430600000 | Active components, Fuse |
| GTIN (EAN) | 4008190046835 | |
| Qty. | 10 pc(s). | |

Contact sleeve



As accessories for our wide product portfolio of fuse terminal blocks, we also offer the appropriate fuse links. The portfolio includes device protection fuses (miniature fuses) from 5x20 mm up to 10x38 mm, E 14 to E 18 fuse links, as well as automotive fuses and automatic circuit breakers. Gauge rings for the fuse holders round off the overall portfolio.

General ordering data

| | | |
|------------|----------------------------|----------------------------|
| Type | VH 25/5/3.4 | Version |
| Order No. | 0553300000 | SAK Series, Contact sleeve |
| GTIN (EAN) | 4008190095604 | |
| Qty. | 100 pc(s). | |

KDKS 1/35 DB

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/8 MC NE WS | Version |
| Order No. | 1856740000 | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400850 | Weidmueller, white |
| Qty. | 800 pc(s). | |

Miscellaneous



We offer a broad portfolio of mounting support for easy handling and supplementation of our products. From various tools to insulating sleeves and various screws, our components are matched to each other down to the last detail and thus facilitate assembly in compliance with the respective standards and protective regulations.

General ordering data

| | | |
|------------|----------------------------|----------------------------|
| Type | BZT 1 ZA WS 10/5 | Version |
| Order No. | 1805520000 | Accessories, Marker holder |
| GTIN (EAN) | 4032248270248 | |
| Qty. | 100 pc(s). | |

| | | |
|------------|----------------------------|----------------------------|
| Type | BZT 1 WS 10/5 | Version |
| Order No. | 1805490000 | Accessories, Marker holder |
| GTIN (EAN) | 4032248270231 | |
| Qty. | 100 pc(s). | |

KDKS 1/35 DB

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Accessories

QB RA



Screwable cross-connections are easy to mount and de mount. Thanks to the big contact surface, even high currents can be transmitted with maximum contact reliability.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | QB 4 WI RA8 IS | Version |
| Order No. | 0461300000 | SAK Series, Cross-connector, Cross-connector, Number of poles: 4 |
| GTIN (EAN) | 4008190025373 | |
| Qty. | 50 pc(s). | |
| Type | QB 3 WI RA8 IS | Version |
| Order No. | 0461200000 | SAK Series, Cross-connector, Cross-connector, Number of poles: 3 |
| GTIN (EAN) | 4008190161699 | |
| Qty. | 50 pc(s). | |
| Type | QB 2 WI RA8 IS | Version |
| Order No. | 0461100000 | SAK Series, Cross-connector, Cross-connector, Number of poles: 2 |
| GTIN (EAN) | 4008190034818 | |
| Qty. | 50 pc(s). | |

Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/8 MC SDR | Version |
| Order No. | 1856750000 | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4032248400867 | Weidmueller, To customer specification |
| Qty. | 160 pc(s). | |

DEK 5/8



WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | | |
|------------|----------------------------|---------|--|
| Type | DEK 5/8 MM WS | Version | |
| Order No. | 2007130000 | | Dekafix, Terminal marker, 5 x 8 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392012 | | |
| Qty. | 500 pc(s). | | |