


With or without terminals



KM 9065



- 2.5-6 mm², Cu 3~

IP
65


- with terminals
- 5-pole per pole 4 x 2.5 mm² sol, 4 x 4 mm² sol, 3 x 6 mm² sol, 2 x 10 mm² sol
- cable entry via knockouts, cable entry to be ordered separately
- for normal environment and protected outdoor
- colour: grey, RAL 7035

rated insulation voltage	U _i = 690 V a.c./d.c.
tightening torque for terminal	1.5 Nm
material	PS (Polystyrene)
degree of protection	IP 65
width	139 mm
height	119 mm
depth	70 mm
weight	0,28 kg
in accordance with	IEC 60670-22

Drawings

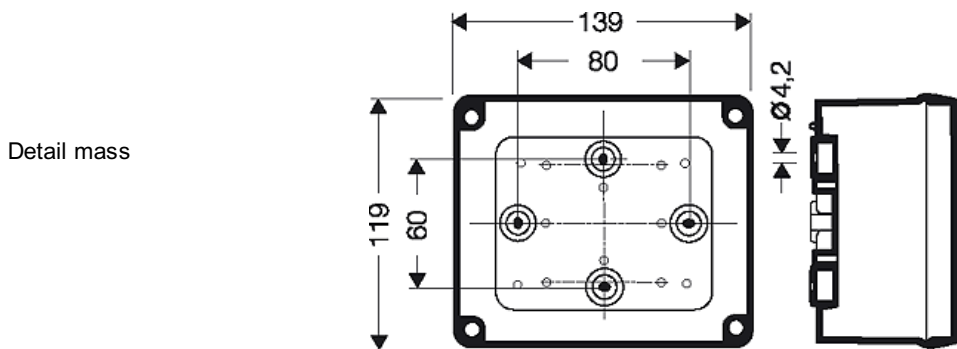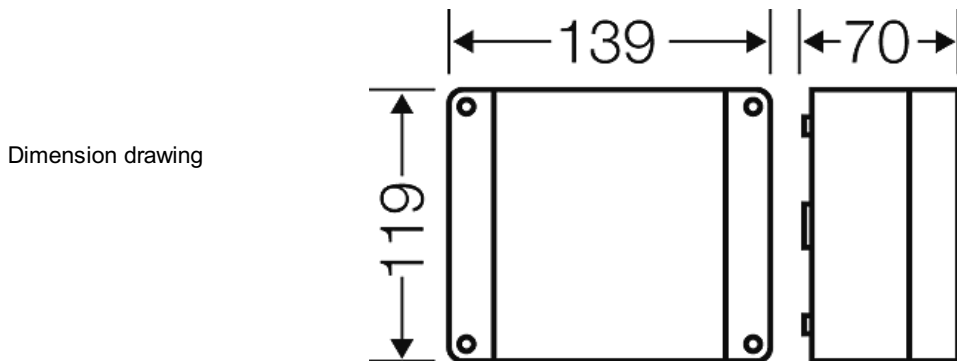


With or without terminals



KM 9065

- 2.5-6 mm², Cu 3~

IP
65

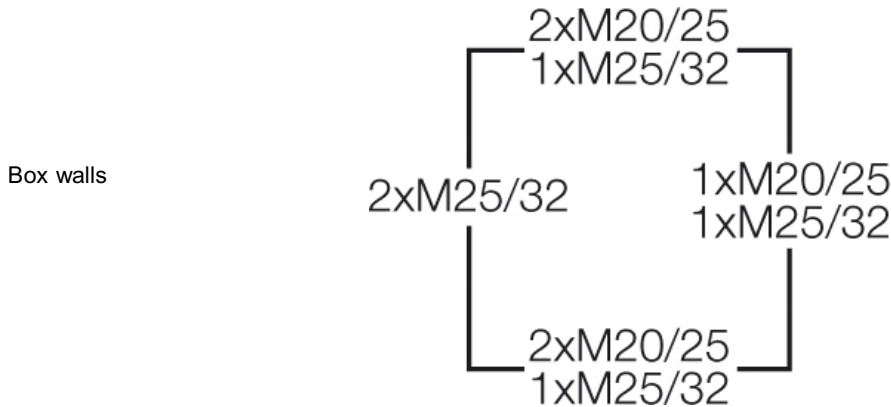

Operating and ambient conditions

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Resistant to occasional cleaning procedures (direct jet)	Resistant to occasional cleaning procedures (direct jet) with high-pressure cleaner without additives, water pressure: max. 100 bar, water temperature: max. 80° C, distance => 0,15 m, in accordance with the requirements IP 69, enclosure and cable glands at least IP 65
Ambient temperature	Average value over 24 hours + 35 °C Maximum value + 40 °C Minimum value - 25 °C
Relative humidity	50% at 40° C short-time 100% at 25° C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position
Burning behaviour	Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: V-2 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK07 (2 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60754-2
Note:	For material properties see technical data.